


FMR Series

250-350MHz Input Frequency Tripler

Features

- Input Frequency: 250 – 350MHz
- Output Frequency: 750 – 1050MHz
- Conversion Gain: 7dB
- F0 Isolation: 40dB
- Input Drive Level: -3dBm
- DC Power: +12V
- SMA Connector

Picture

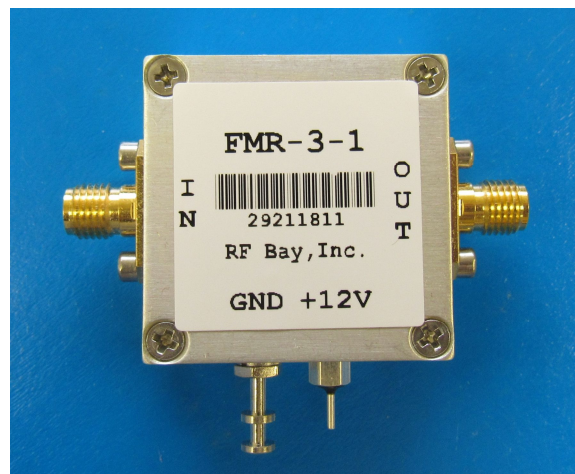

Performance@300MHz, Pin= -3dBm



Description



FMR-3-1 is an active frequency tripler operates with input frequency range from 250 to 350MHz and output frequency range from 750 to 1050MHz.

Electrical Specifications @ +25 °C, $Z_{IN} = Z_{OUT} = 50\Omega$, $P_{IN} = -3dBm$, +12V

Parameter	Unit	Min.	Typ.	Max.
Input Frequency Range	MHz	250		350
Output Frequency Range	MHz	750		1050
Conversion Gain	dB	2	7	
F0 Isolation *	dB	30	40	
2F0 Isolation *	dB	20	30	
4F0 Isolation *	dB	40	50	
VSWR Input @ 300MHz			1.4:1	2.0:1
Output @ 900MHz			1.6:1	2.0:1
DC Supply Voltage	V	10	12	15
Operating Current	mA		105	125

* Isolation with respect to output power level

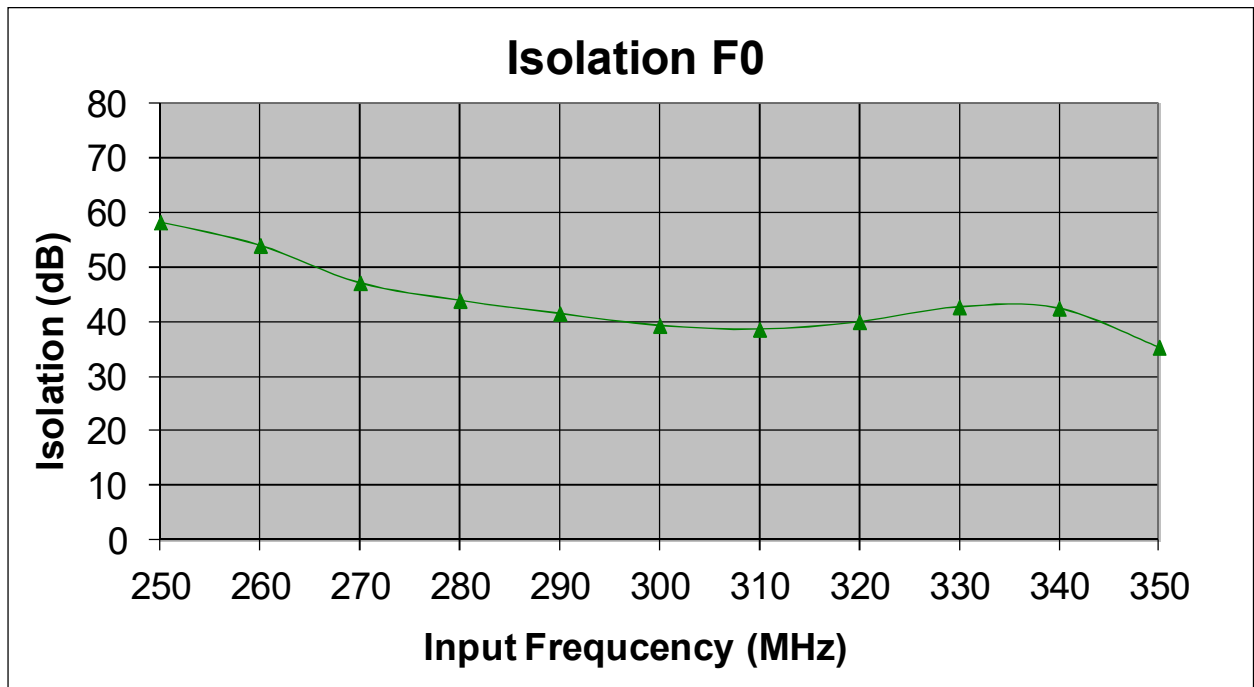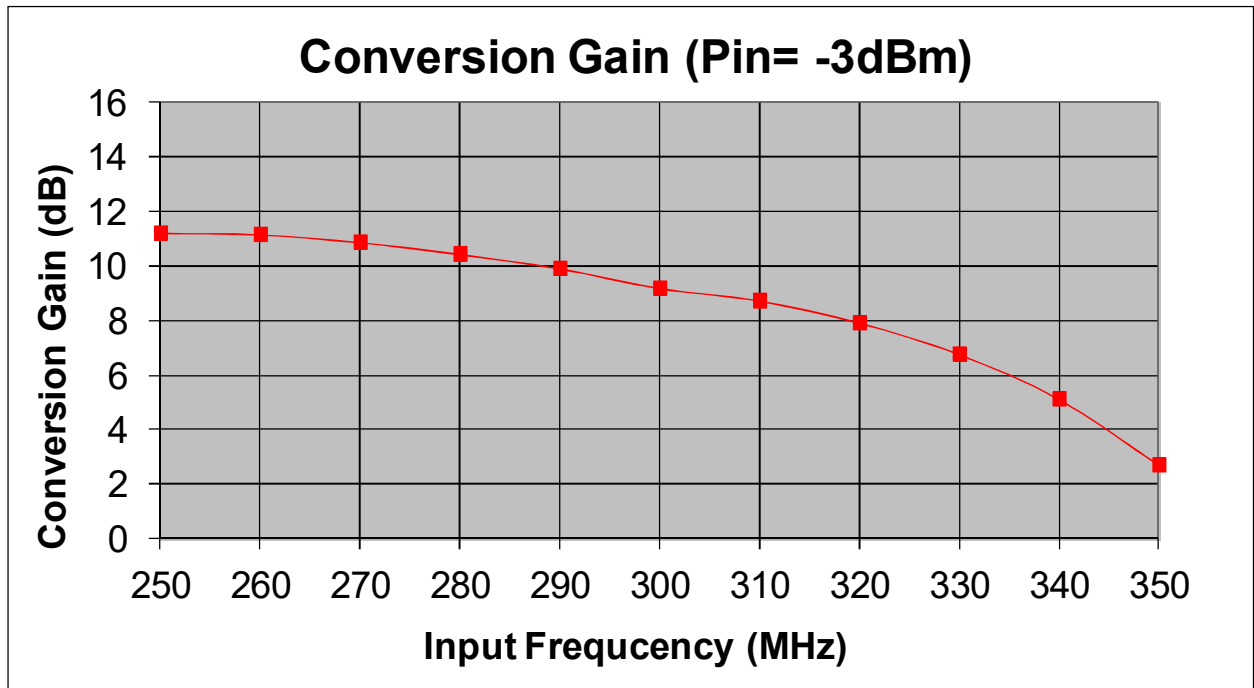


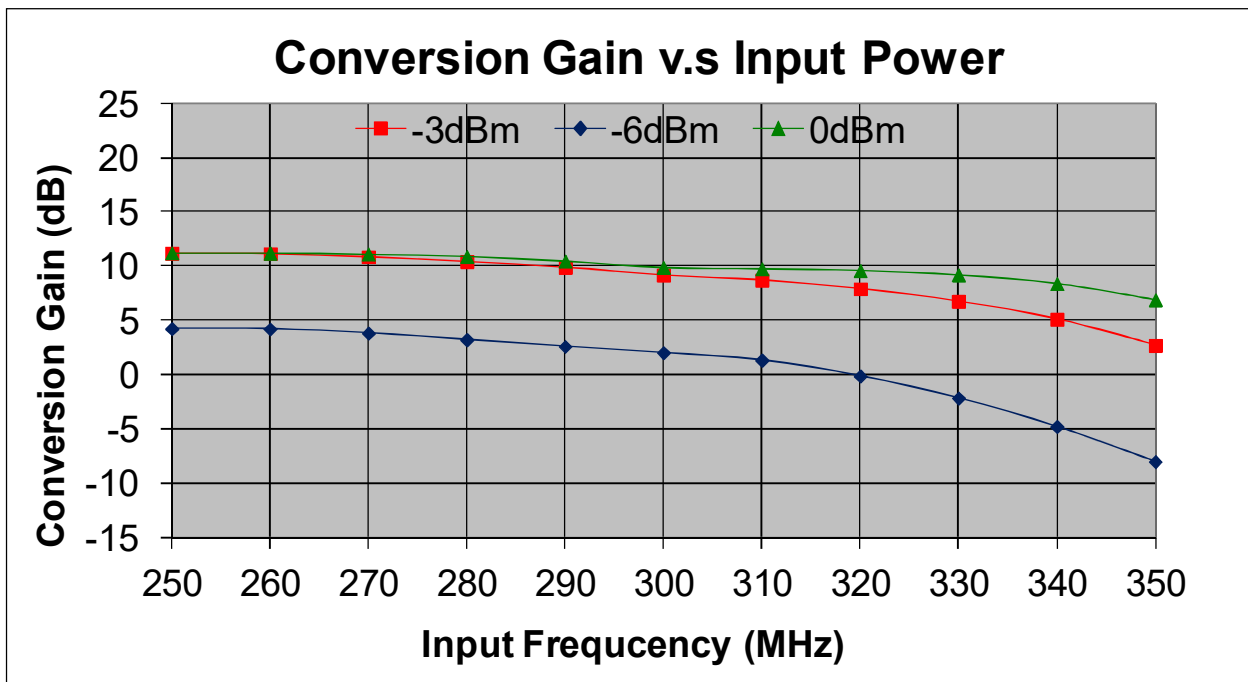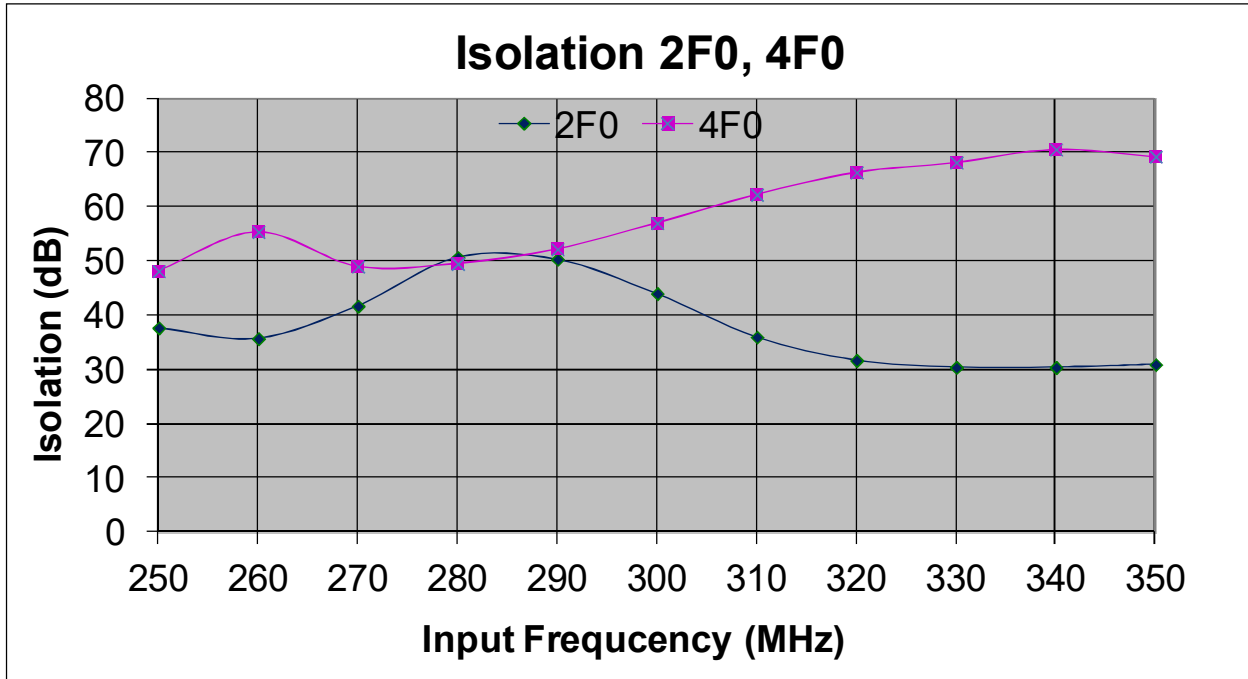


FMR Series

250-350MHz Input Frequency Tripler

Return Loss S11 vs Frequency

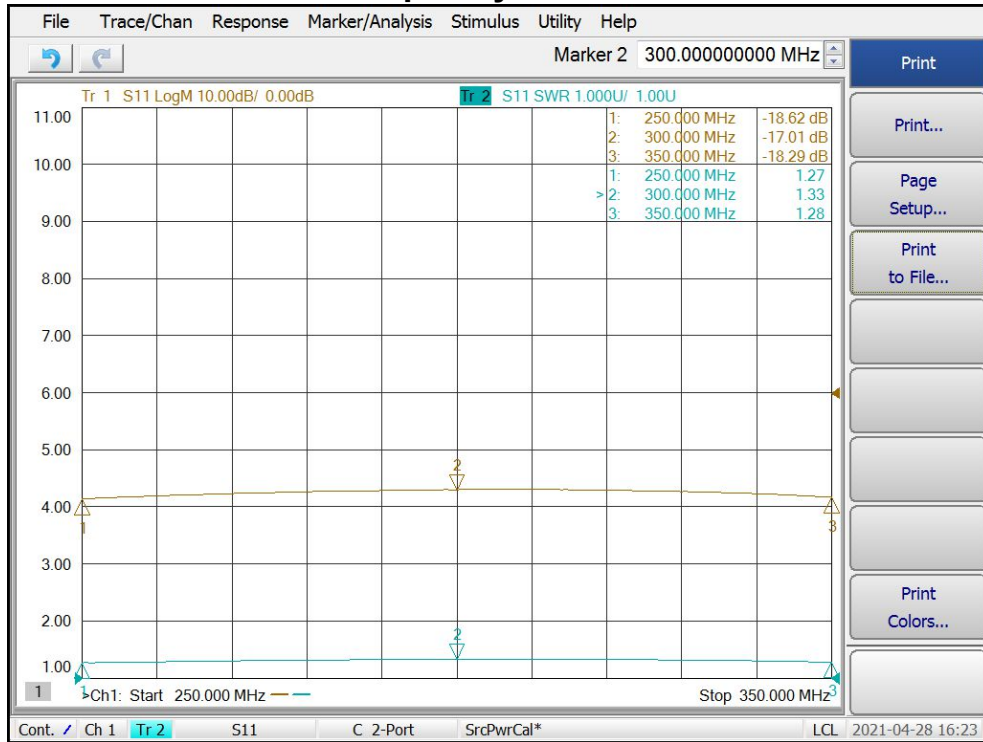

Return Loss S22 vs Frequency

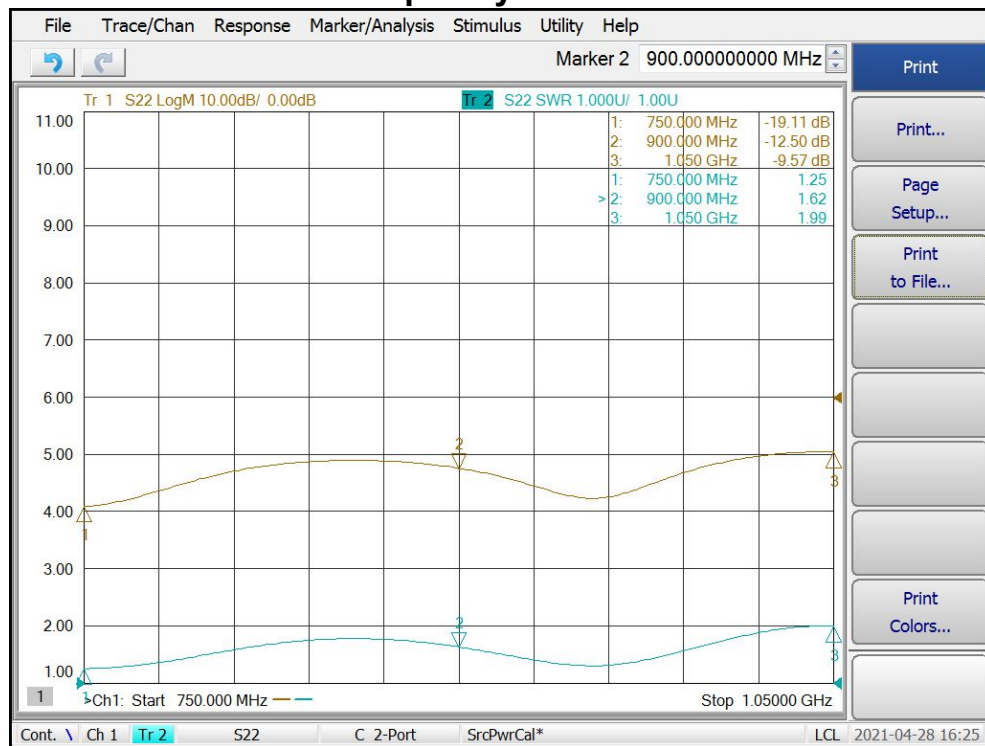

FMR Series

250-350MHz Input Frequency Tripler


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+23dBm
Supply DC Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +105 °C

ESD Sensitive Material



Outline

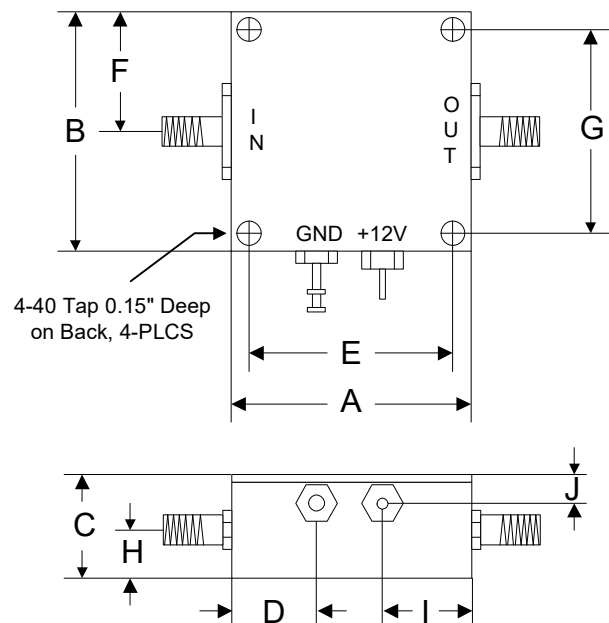

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76