


Level 13

700-2000MHz Frequency Mixer

Features

- LO/RF: 700–2000MHz
- IF: DC–500MHz
- LO Level: +13dBm
- Conversion Loss: 9dB typ.
- RF Input: Up to +10dBm
- Input IP3: +17dBm
- SMA Female All Ports

Picture

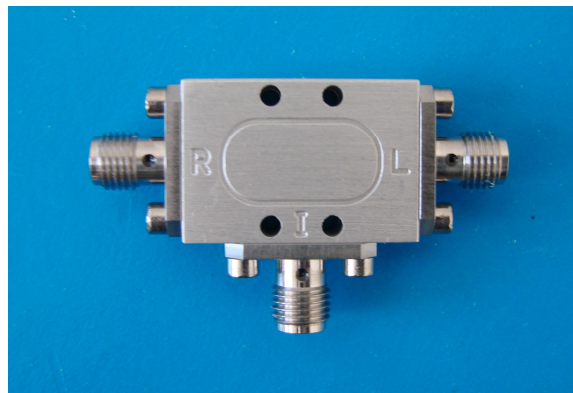

Description

GXR-13 is a passive double balanced mixer with 700 to 2000Hz at RF/LO port and DC to 500MHz at IF port. The mixer operates with LO drive level range from +10dBm to +16dBm.







Electrical Specifications @ +25 °C, IF=100MHz, LO=+13dBm, 50 Ω

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	LO/RF	MHz	700	2000
	IF	MHz	DC	500
Conversion Loss		dB	9	10.5
LO-RF Isolation		dB	20	24
LO-IF Isolation		dB	13	17
RF-IF Isolation		dB	10	14
RF Input P _{1dB}		dBm	+7	+10
Input IP3		dBm	+13	+17

Level 13

700-2000MHz Frequency Mixer




Typical Performance

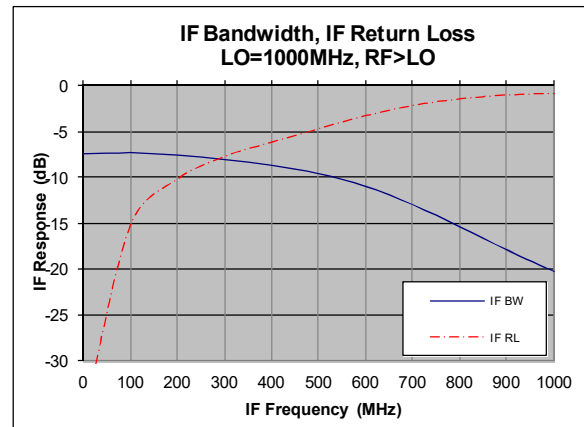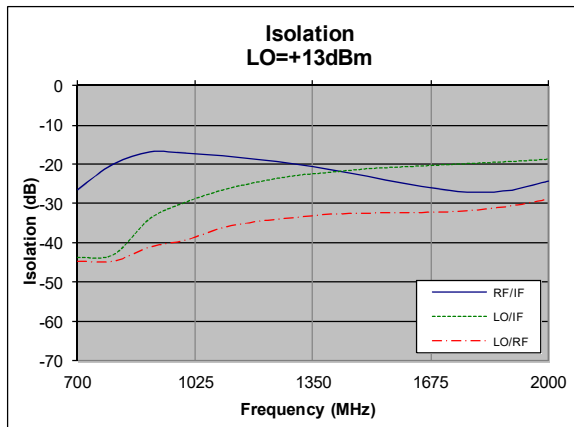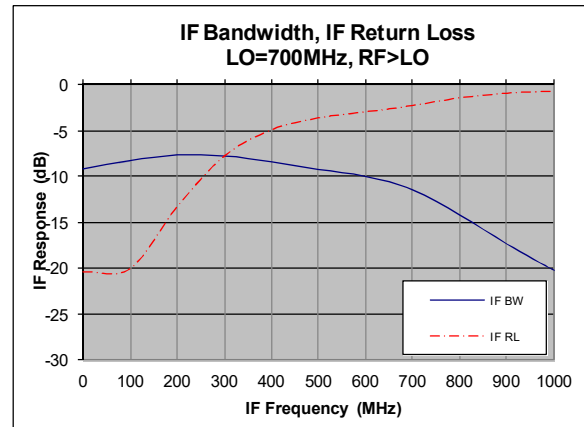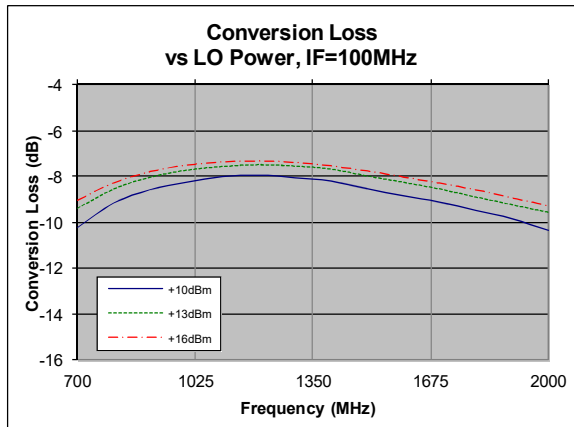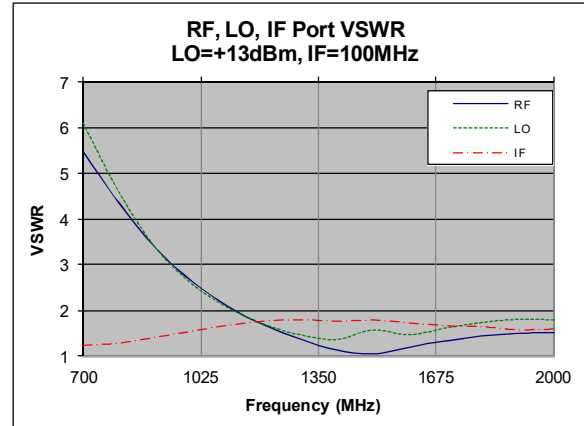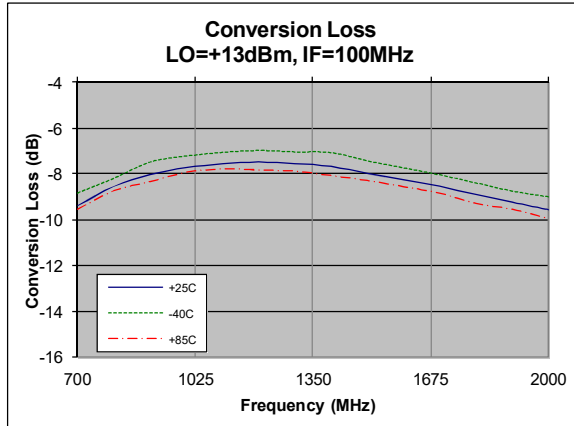

Level 13

700-2000MHz Frequency Mixer

Typical Performance

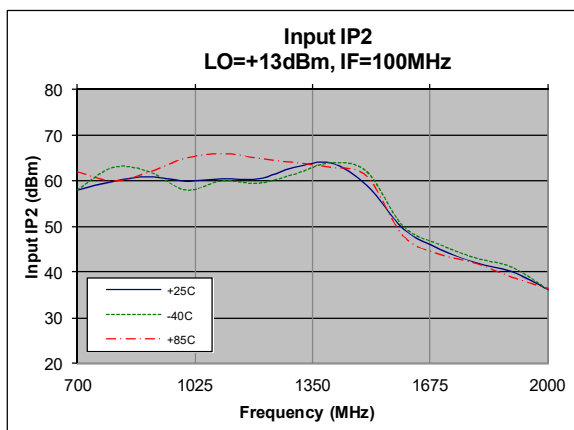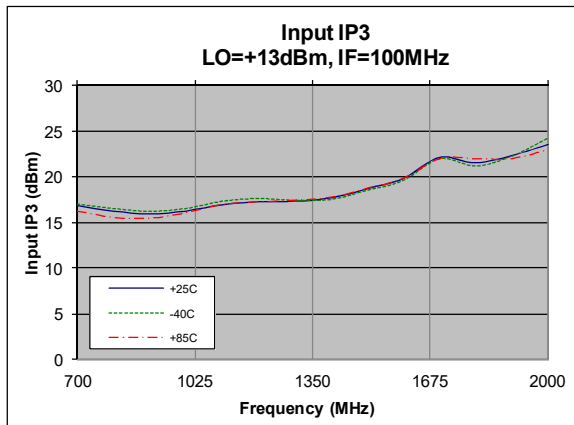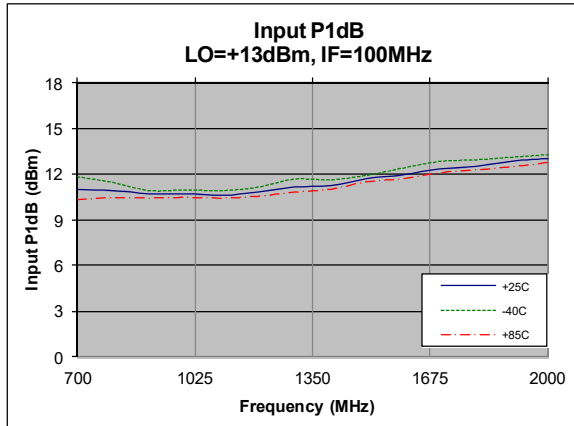


Level 13

700-2000MHz Frequency Mixer

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	+13dBm
LO Driver	+27dBm
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C

Schematic

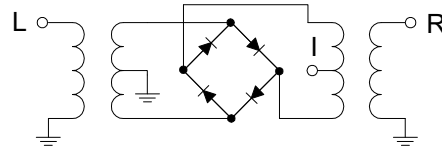

Outline

