

FDR Series

1.25-3.0GHz Input Frequency Doubler


Features

- Input Frequency: 1.25 – 3.0GHz
- Output Frequency: 2.5 – 6.0GHz
- Conversion Loss: 15dB
- F0 Isolation: 25dB
- Input Drive Level: +12 to +18dBm
- No DC Power Required
- SMA Connector

Description

FDR-3-6 is a passive frequency doubler operates with input frequency range from 1.25 to 3.0GHz and output frequency range from 2.5 to 6.0GHz.

Picture

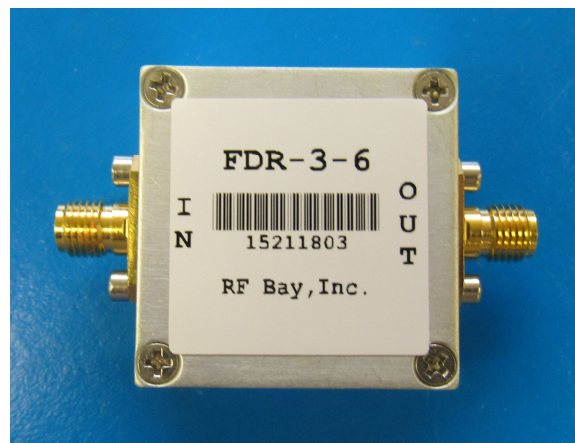



Electrical Specifications @ +25 °C, $Z_{IN} = Z_{OUT} = 50\Omega$, $P_{IN} = +15\text{dBm}$



Parameter	Unit	Min.	Typ.	Max.
Input Frequency Range F0	GHz	1.25		3.0
Output Frequency Range 2F0	GHz	2.5		6.0
Conversion Loss	dB		15	19
Input power P_{IN}	dBm	+12		+18
F0 Isolation *	dB	10	25	
3F0 Isolation *	dB	15	30	
Input VSWR S_{11} @ 2.12GHz			1.6:1	2.5:1
Output VSWR S_{22} @ 4.25GHz			2.5:1	3.5:1

* Isolation with respect to output power level of 2F0

FDR Series

1.25-3.0GHz Input Frequency Doubler

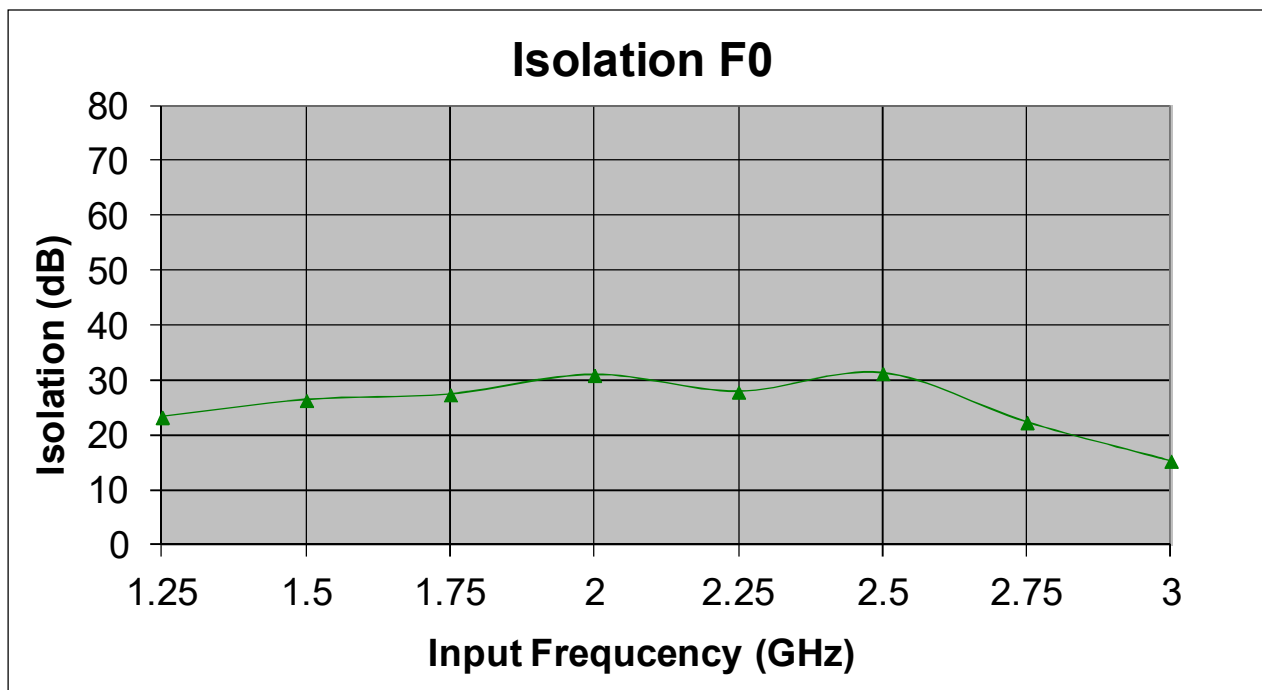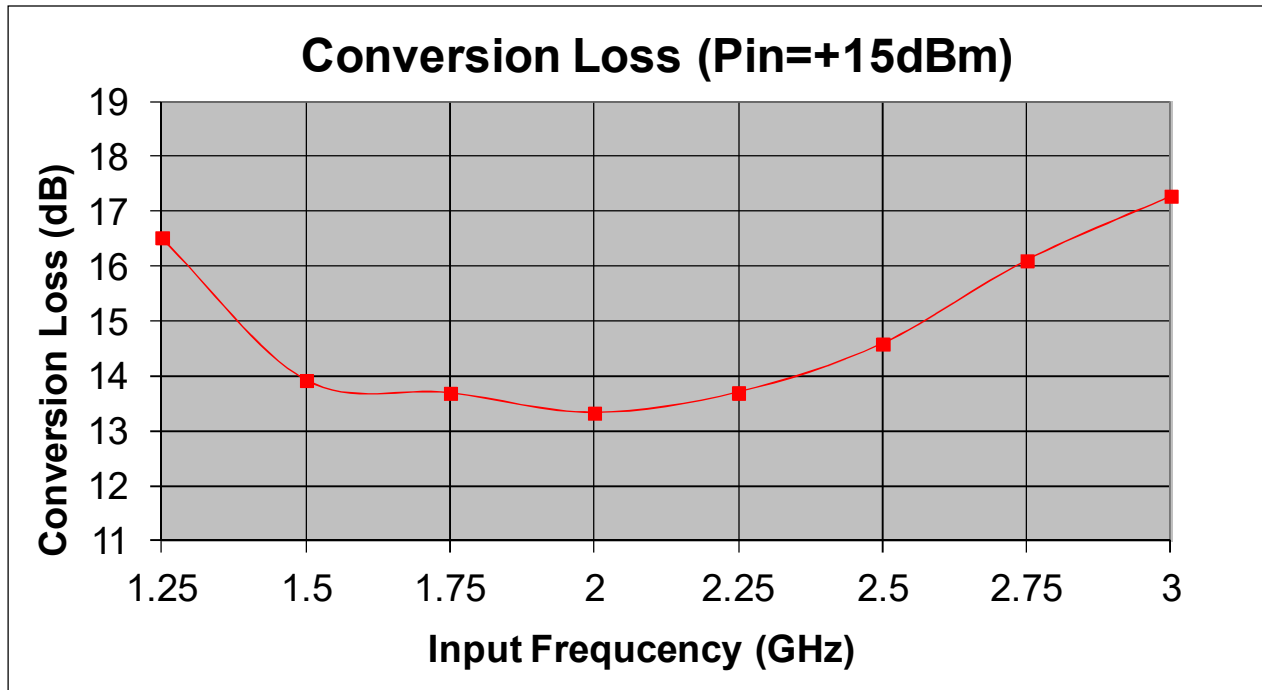


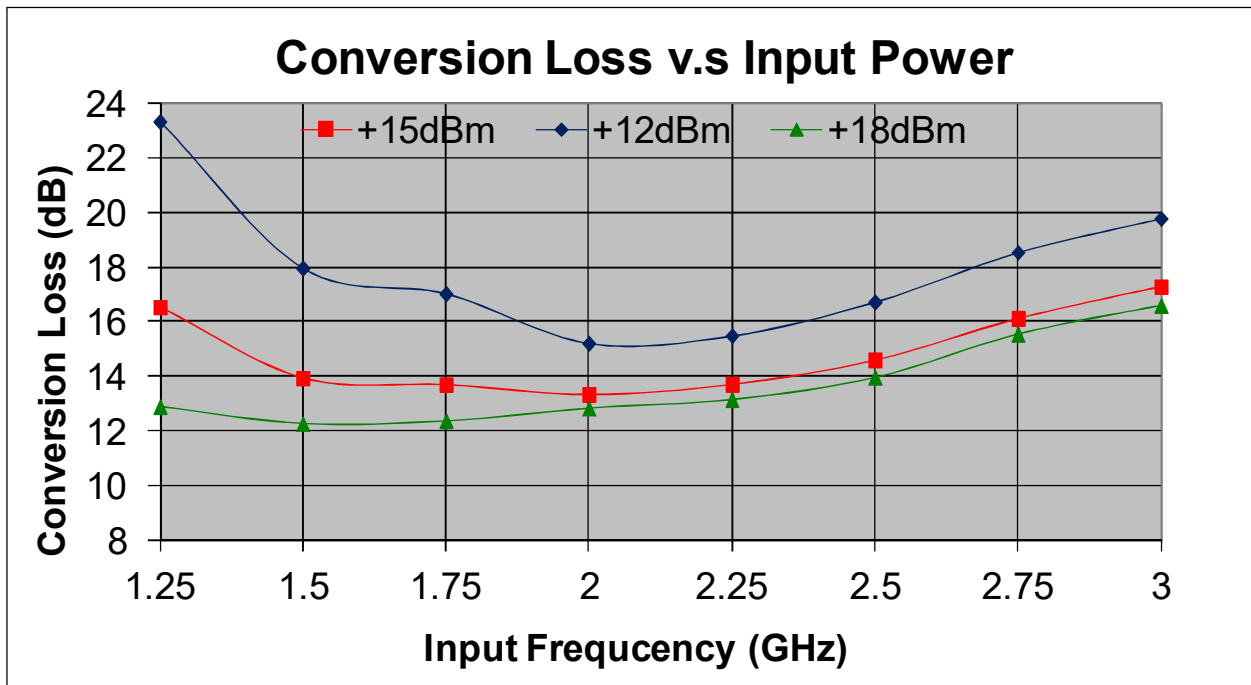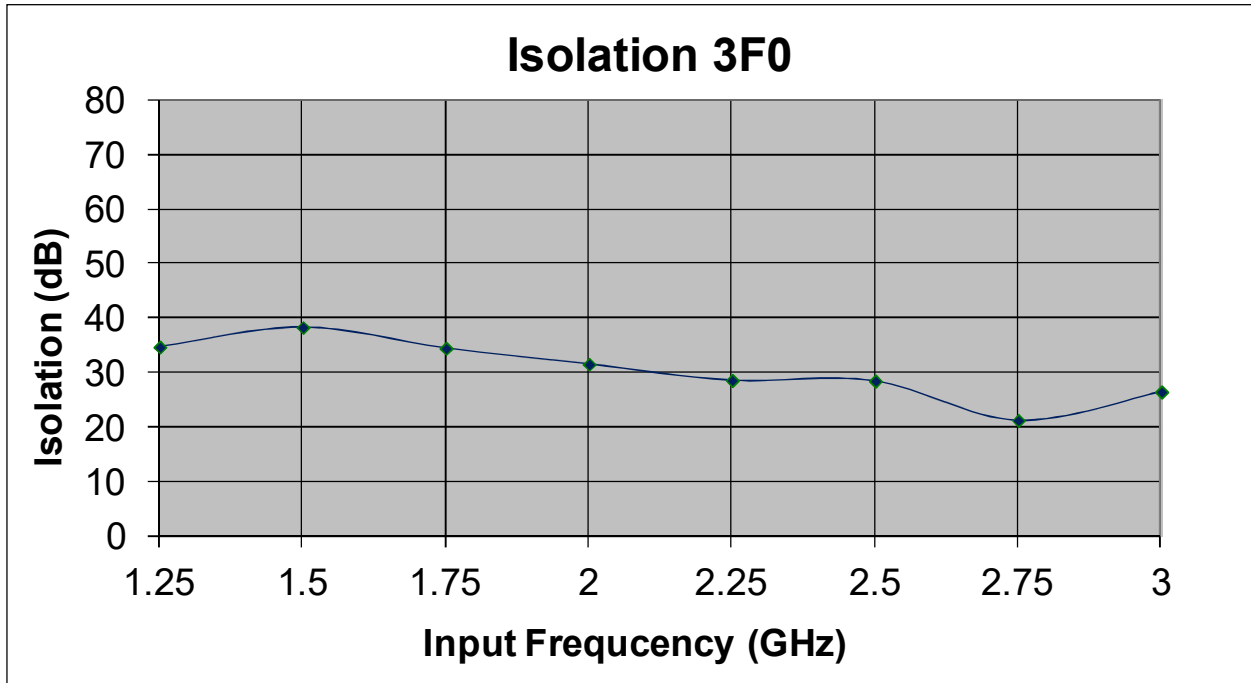


FDR Series

1.25-3.0GHz Input Frequency Doubler

Return Loss S11 vs Frequency

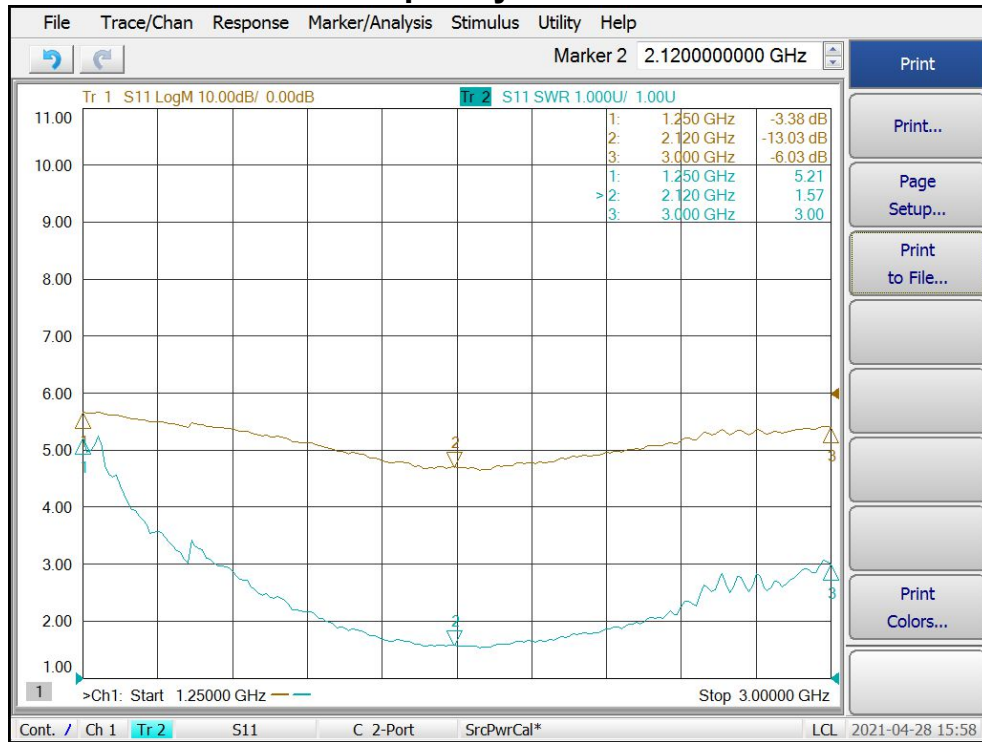

Return Loss S22 vs Frequency

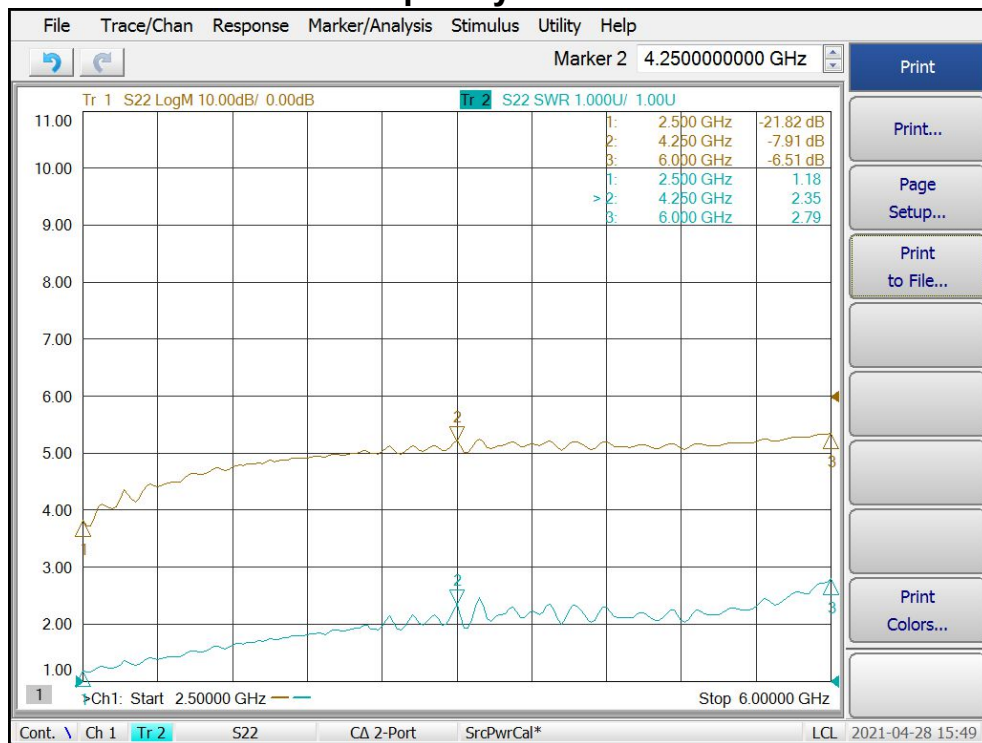

FDR Series

1.25-3.0GHz Input Frequency Doubler


Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+27dBm
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-65 °C to +150 °C

ESD Sensitive Material



Outline

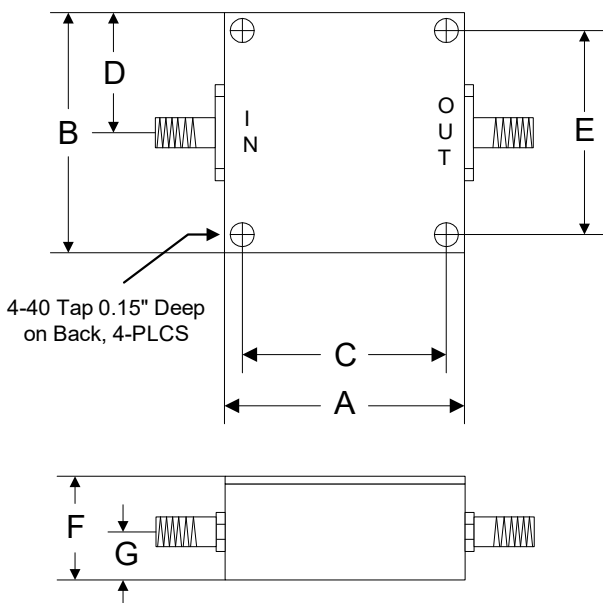

	A	B	C	D	E	F	G
Inch	1.250	1.250	1.000	0.625	1.000	0.563	0.250
mm	31.75	31.75	25.40	15.88	25.40	14.29	6.35