


## GPA Series

## 8 – 16GHz RF Amplifier

### Features

- Frequency Range: 8-16GHz
- Gain: 13dB
- P<sub>1dB</sub>: +16dBm
- IP3: +27dBm
- Noise Figure: 4.5dB (typ.)
- DC Power: 12V @ 45mA
- SMA-female connectorized

### Photo

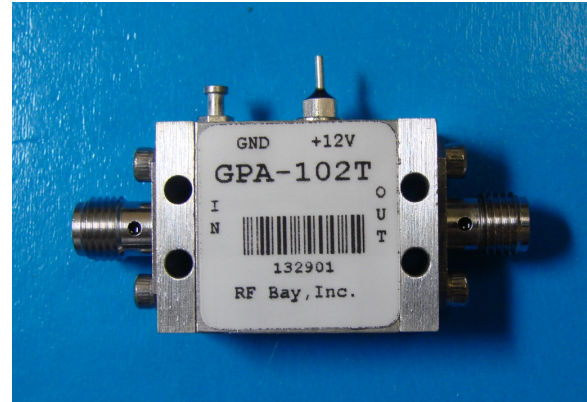

### Description

GPA-102T is a high performance RF Microwave Driver Amplifier, with standard frequency range of 8GHz to 16GHz.







### Electrical Specifications @+25 °C, Z<sub>in</sub>=Z<sub>out</sub>=50 Ohm, V<sub>supply</sub> = +12VDC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	8		16
Gain (S <sub>21</sub> ) f = 8GHz	dB		18.0	
f = 12GHz	dB	12.5	13.5	
f = 16GHz	dB		13.0	
Gain Variation Over Temperature	dB/°C		0.02	0.03
Output Power P <sub>1dB</sub>	dBm		+16	
Saturated Output Power P <sub>Sat</sub>	dBm		+17.5	
Output Third Order Intercept IP3	dBm		+27	
Noise Figure @12GHz	dB		4.5	5.5
Reverse Isolation (S <sub>12</sub> ) @12GHz	dB		-26	
VSWR-Input (S <sub>11</sub> )	ratio:1	2.4 @8GHz	1.5 @12GHz	1.5 @16GHz
VSWR-Output (S <sub>22</sub> )	(unitless)	1.4 @8GHz	1.4 @12GHz	2.0 @16GHz
DC Power Supply - voltage	V	11	12 or 15	18
DC Power Supply - current	mA		45	55
Operating Temperature	°C	-40		+85
Size (RF/DC feedthru's excluded)	Inch	1.00 (L) x 0.75 (W) x 0.45 (H)		
Weight	Oz	0.6 (17 grams)		

**GPA Series**

**8 – 16GHz RF Amplifier**







**Typical Performance @+25 °C**

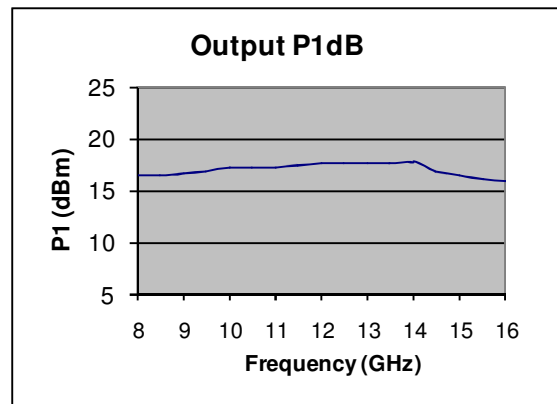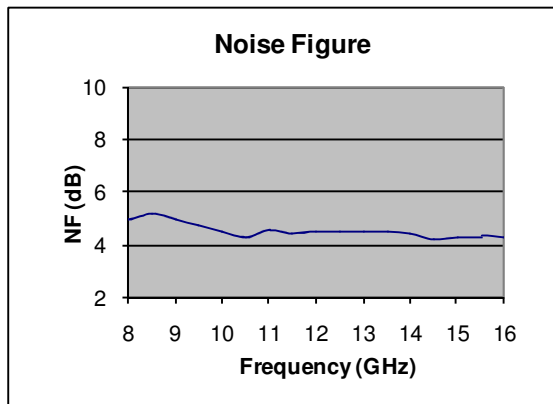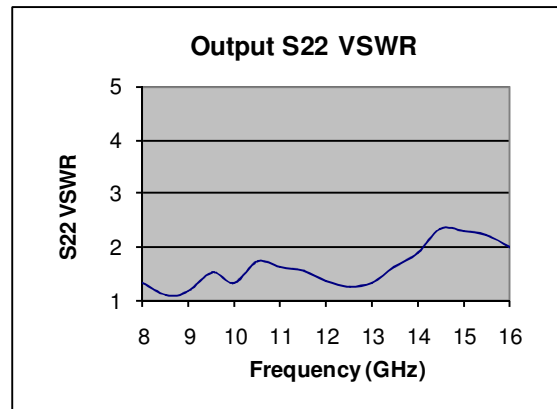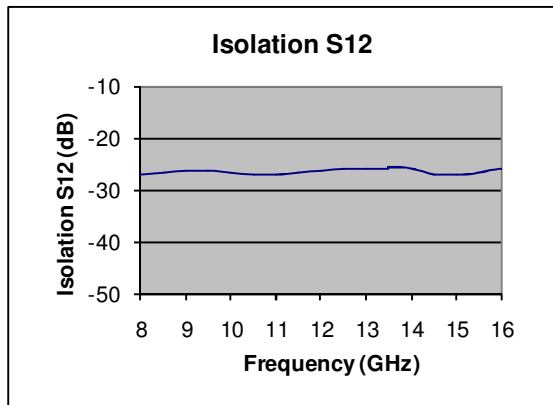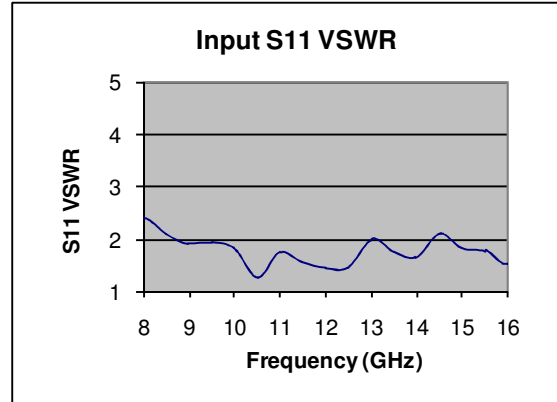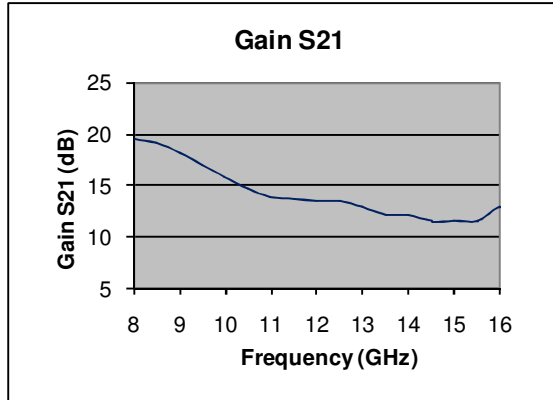

**GPA Series**

**8 – 16GHz RF Amplifier**

**Typical Performance @+25 °C**

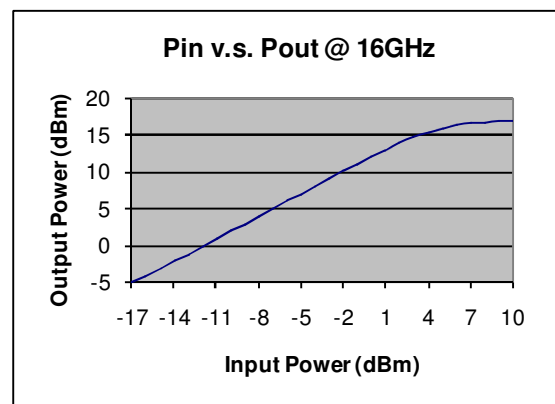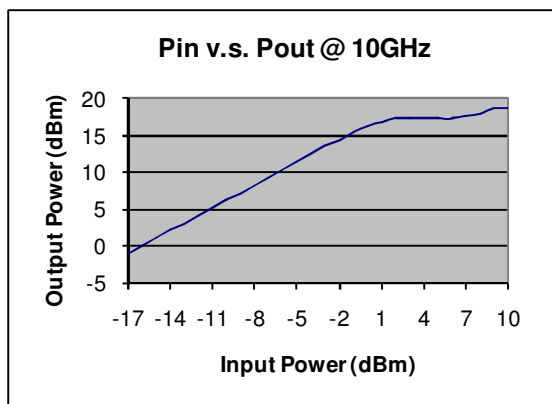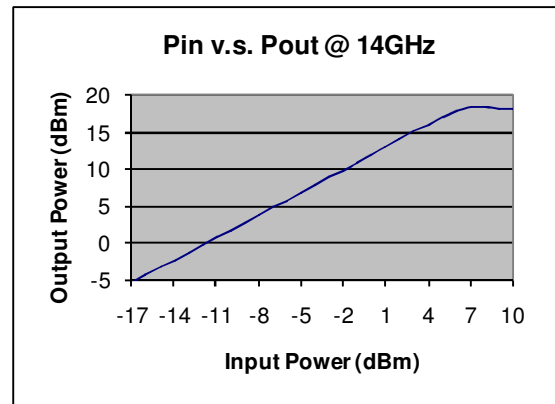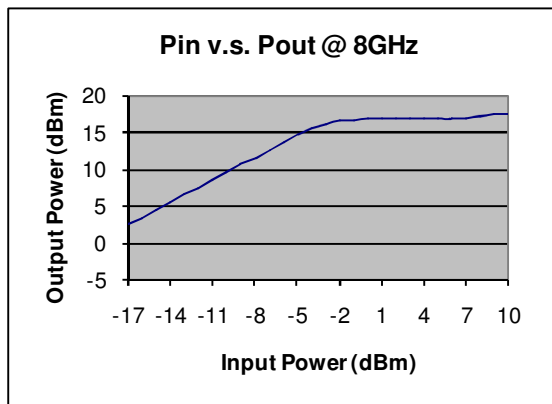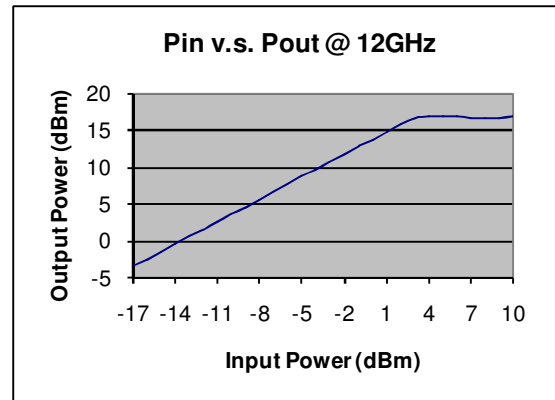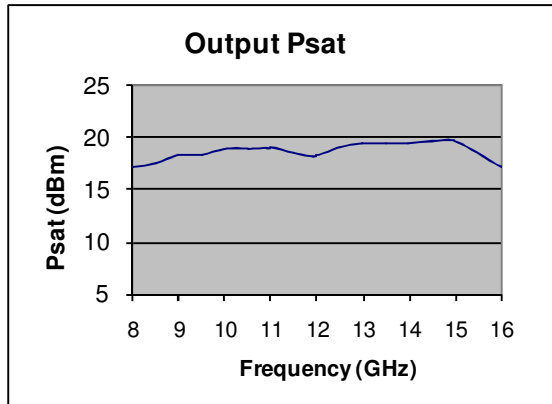

**Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF Input Power	+23dBm
Supply Voltage (Survival)	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

**Outline**

