


JPA Series

1-14GHz 4W RF Power Amplifier

Features

- Frequency Range: 1000-14000MHz
- Small Signal Gain: 50dB
- P_{SAT}: +36dBm (4W)
- OIP3: +40dBm
- Noise Figure: 4dB
- DC Power: +24V @ 1700mA
- DC Power Reverse Protected
- RF Connector: SMA Female
- GaN RF Power Amplifier
- Class AB Power Amplifier

Picture

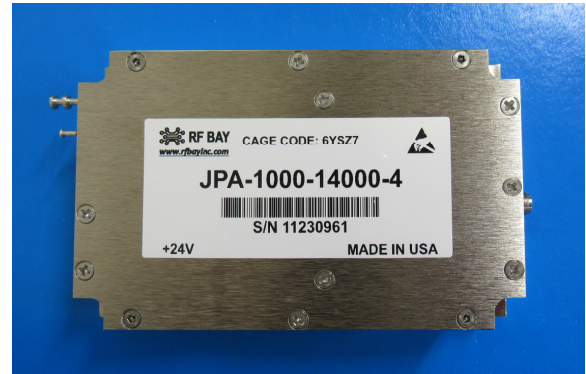


Electrical Specifications @+25°C, Z_{in}=Z_{out}=50 Ω, DC Power Supply = +24DC

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	1000		14000
Small Signal Gain (S ₂₁) (P _{IN} = -40dBm)	f = 1000MHz		50	
	f = 7500MHz	50	52	
	f = 14000MHz		51	
Gain Flatness	dB		±1.5	±2.0
Output Power P _{SAT}	f = 1000MHz		+36	
	f = 7500MHz	+36	+37.5	
	f = 14000MHz		+36	
Output IP3	f = 7500MHz		+40	
Efficiency P _{IN} = -5dBm, f = 7500MHz	%		15	
Noise Figure	f = 7500MHz		4	5
Reverse Isolation (S ₁₂)	dB		-55	
VSWR-Input (S ₁₁)	f = 7500MHz		1.5:1	2.0:1
DC Supply Voltage	V	20	24	28
DC Supply Current	No RF Input		1000	1200
	P _{SAT} = +40dBm		1700	1900


JPA Series

1-14GHz 4W RF Power Amplifier

Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

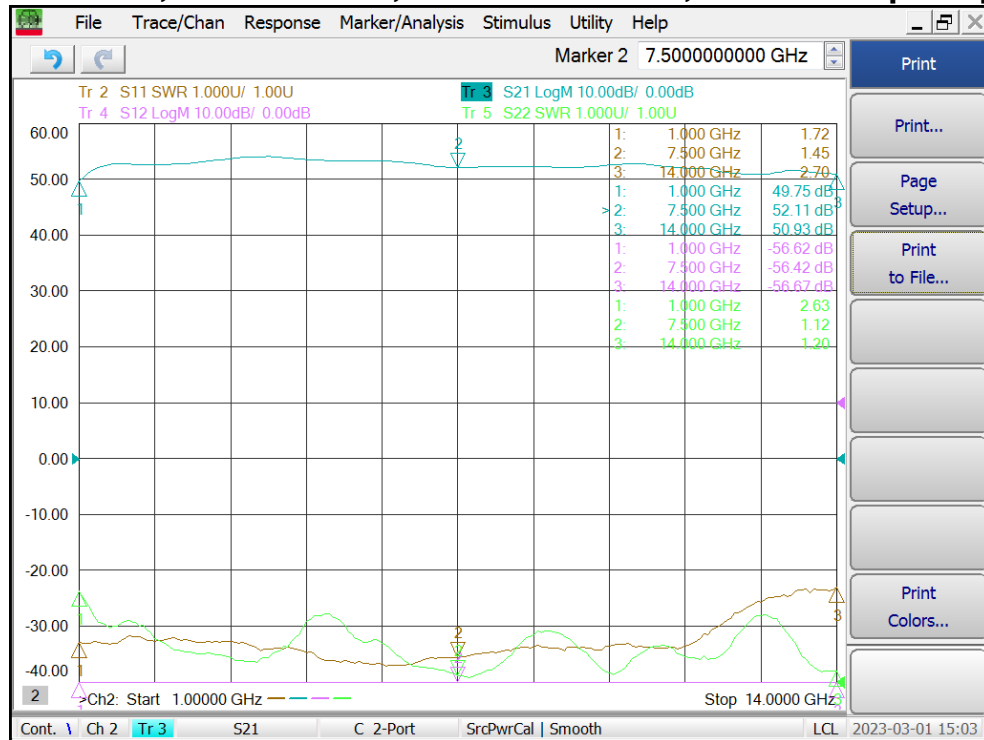







Noise Figure vs Frequency

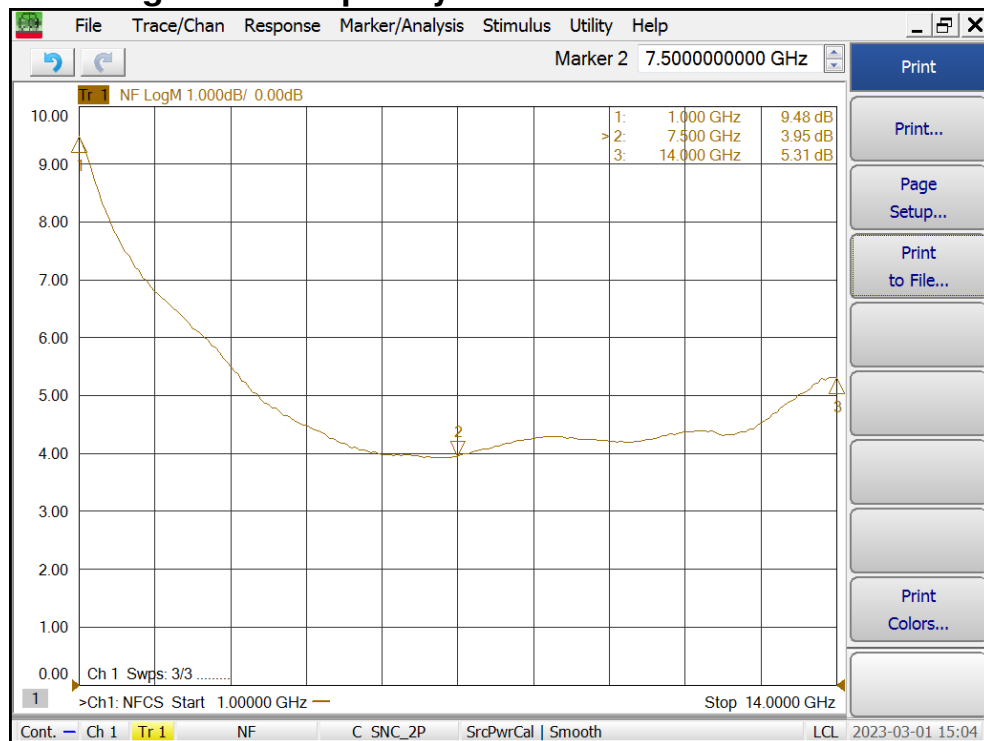

JPA Series

1-14GHz 4W RF Power Amplifier







Typical Performance @ +25°C

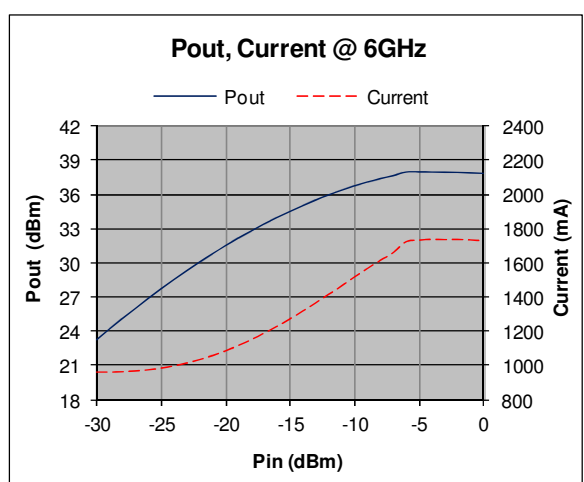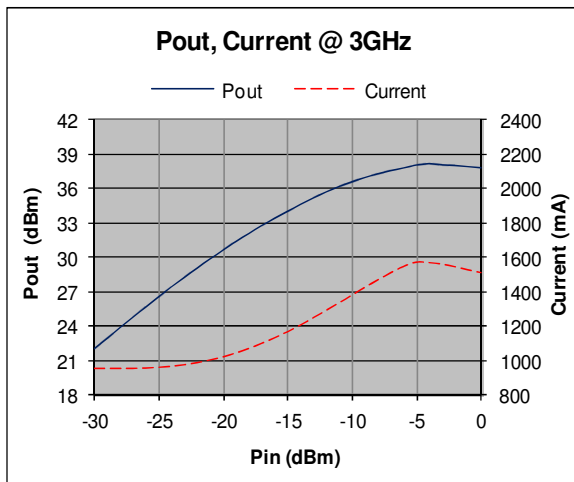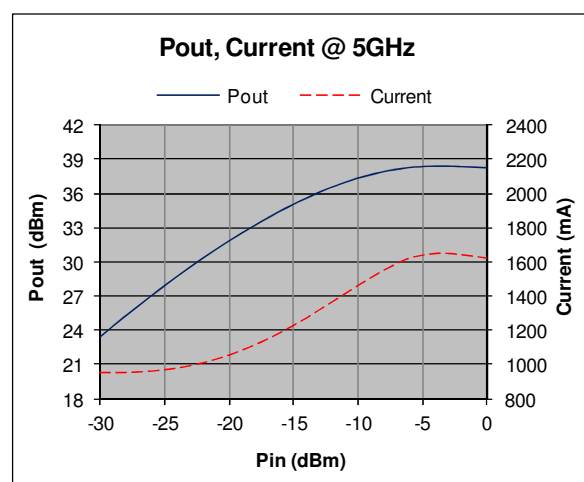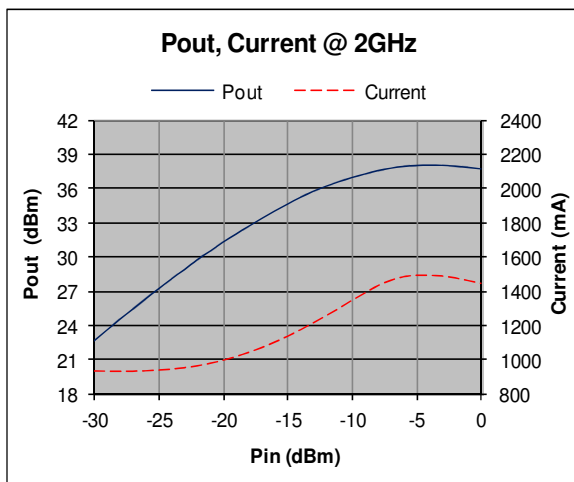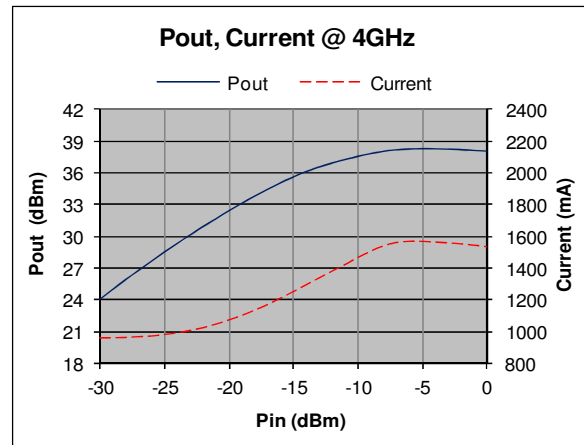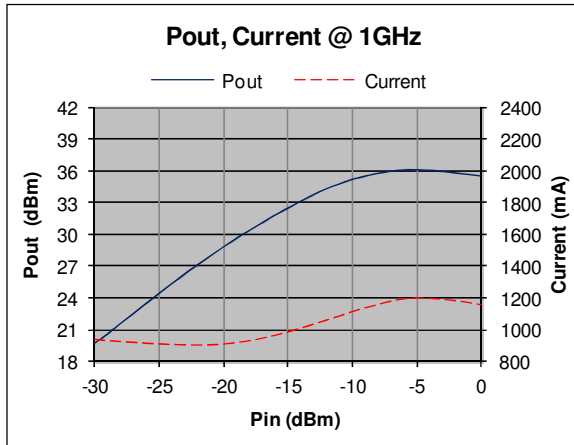

JPA Series

1-14GHz 4W RF Power Amplifier







Typical Performance @ +25°C

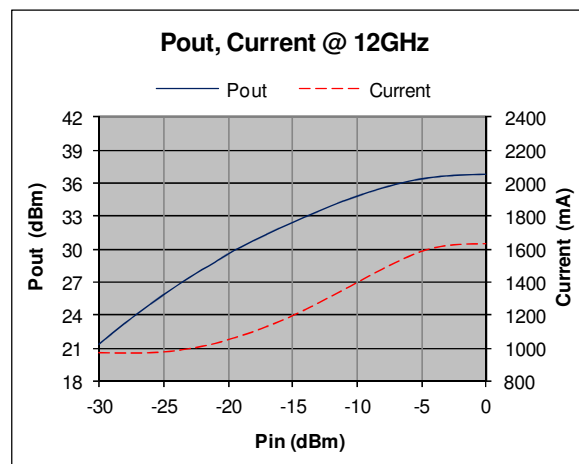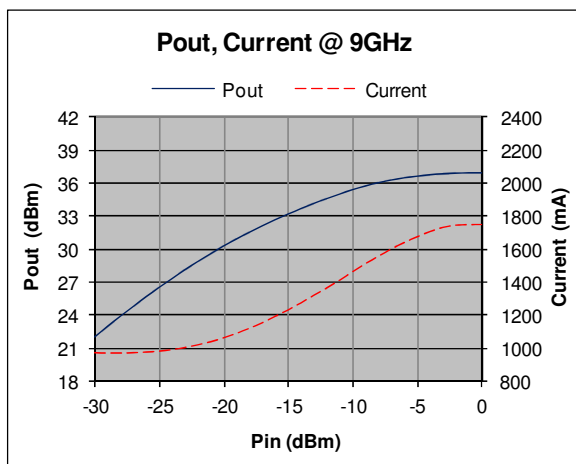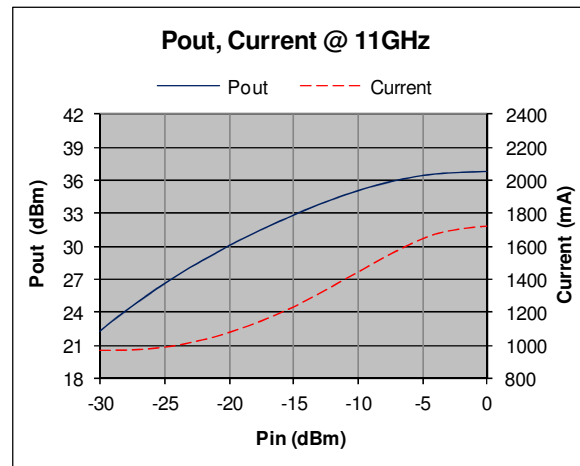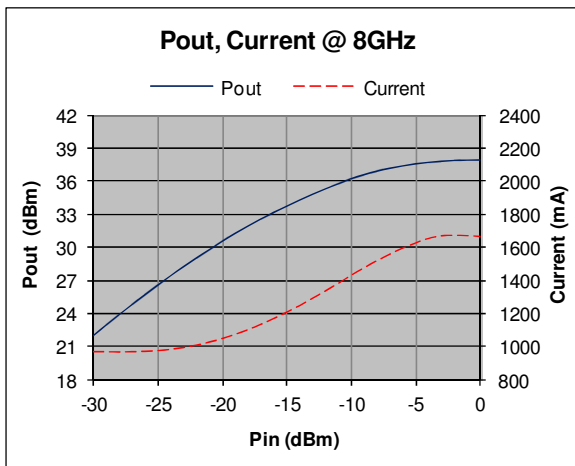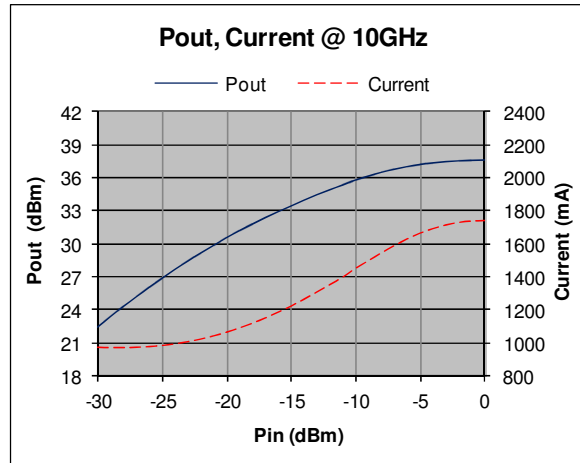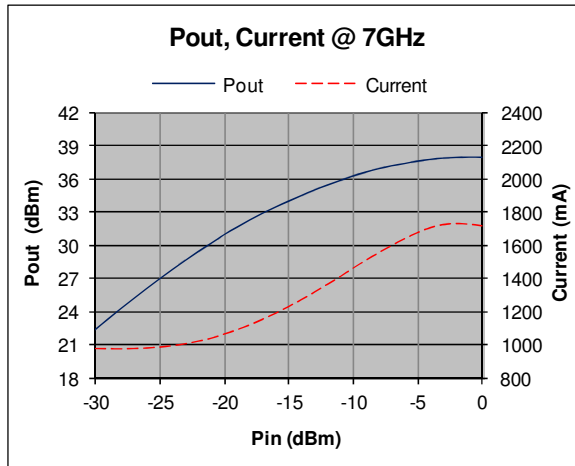

JPA Series

1-14GHz 4W RF Power Amplifier







Typical Performance @ +25°C

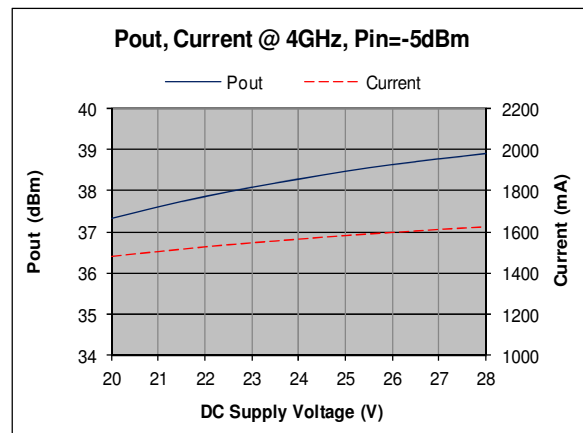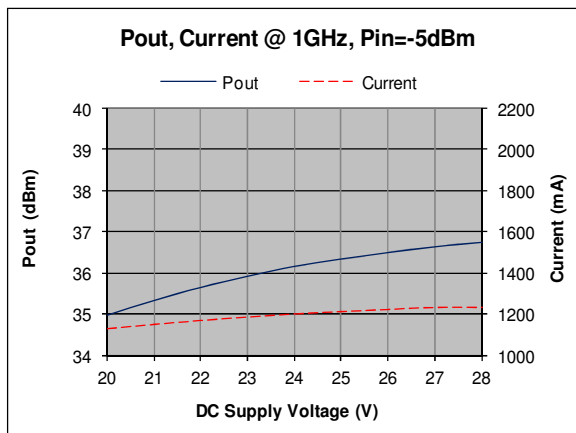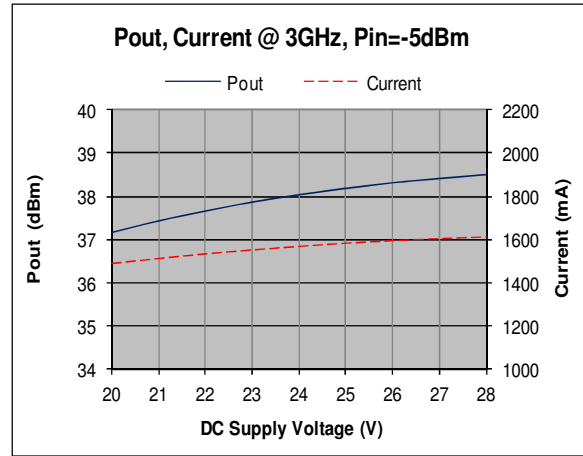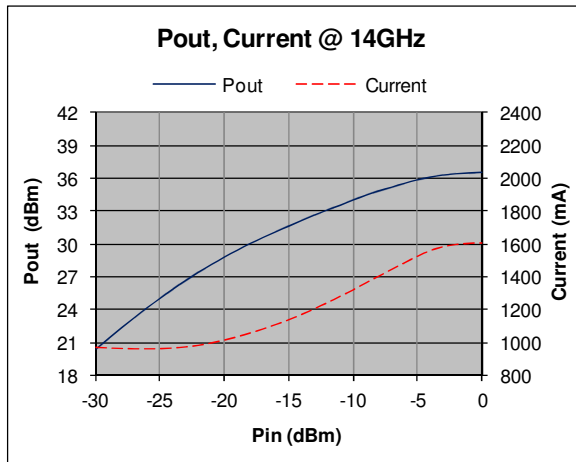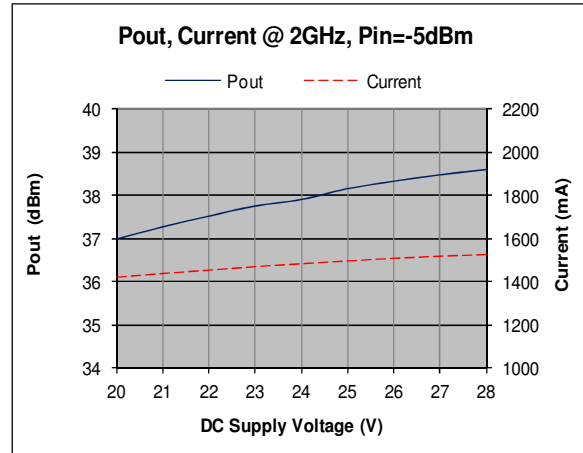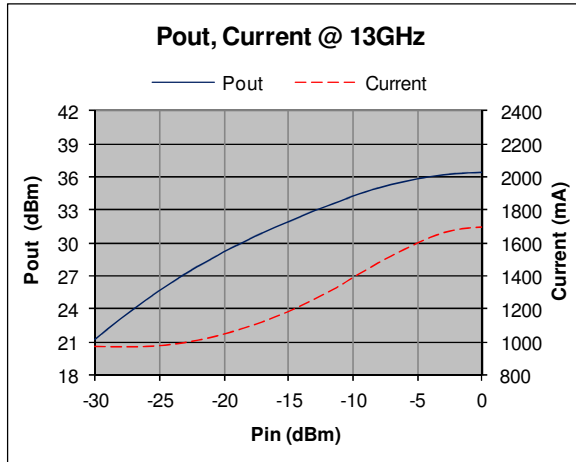

JPA Series

1-14GHz 4W RF Power Amplifier







Typical Performance @ +25°C

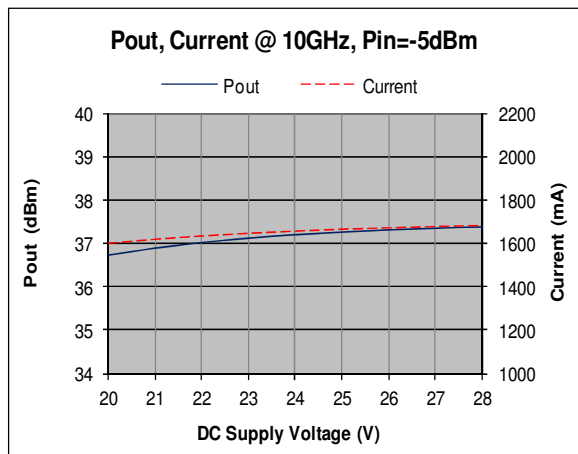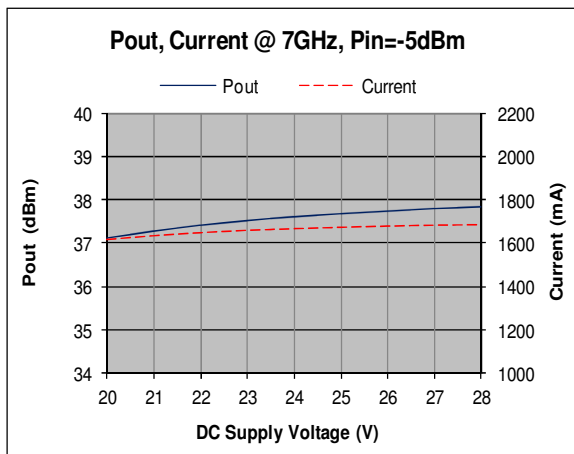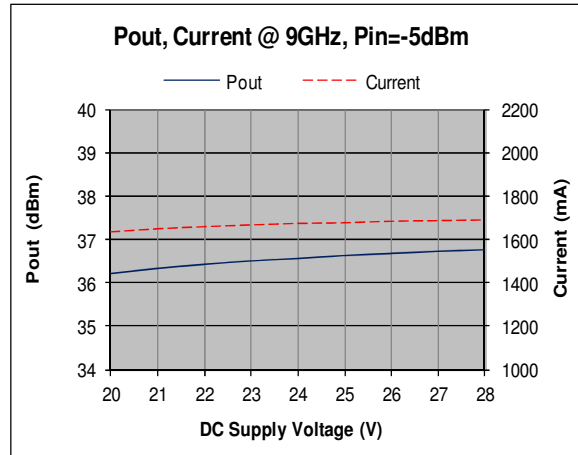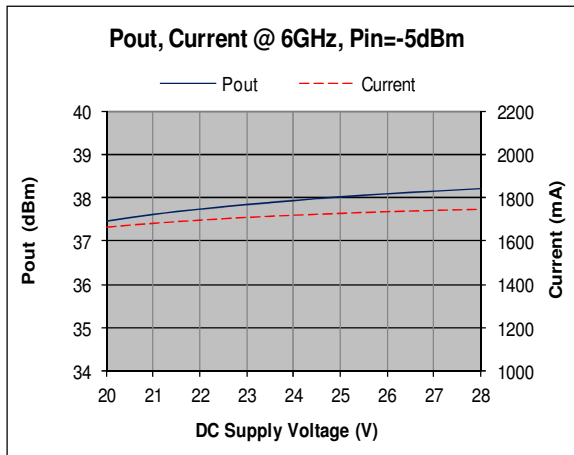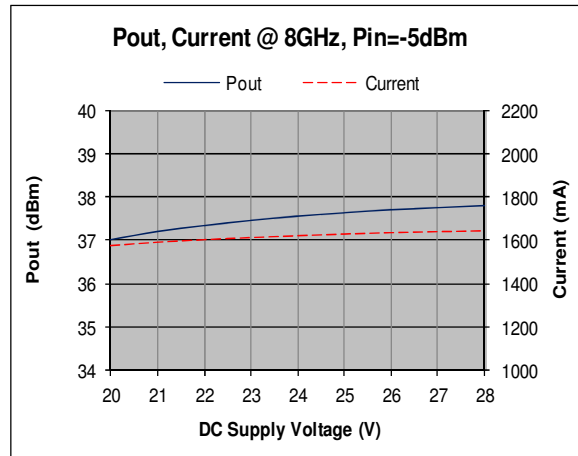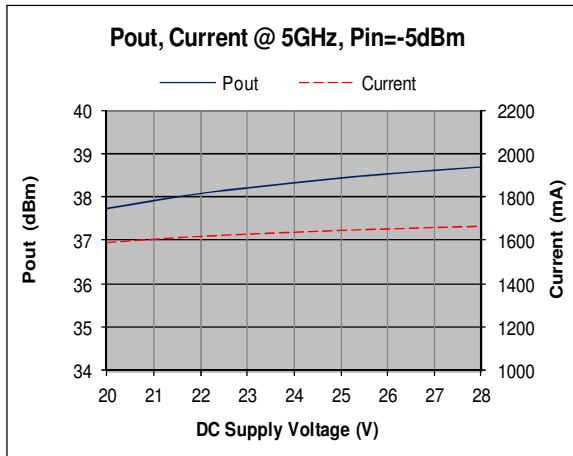

JPA Series

1-14GHz 4W RF Power Amplifier

Typical Performance @ +25°C

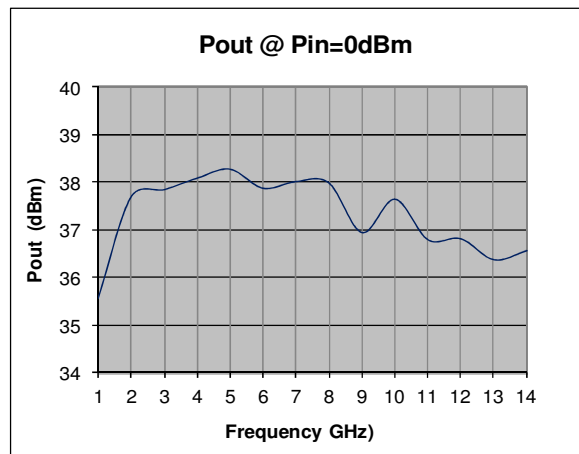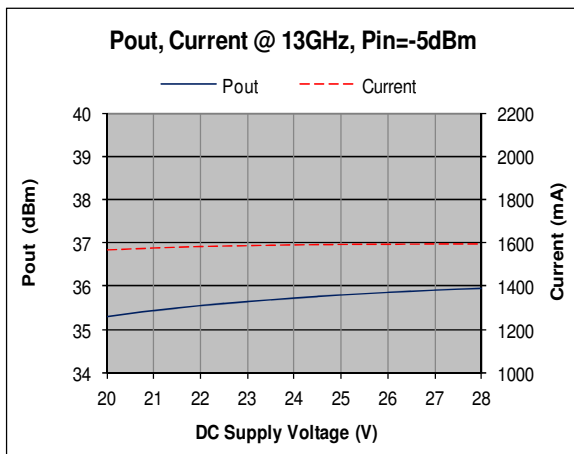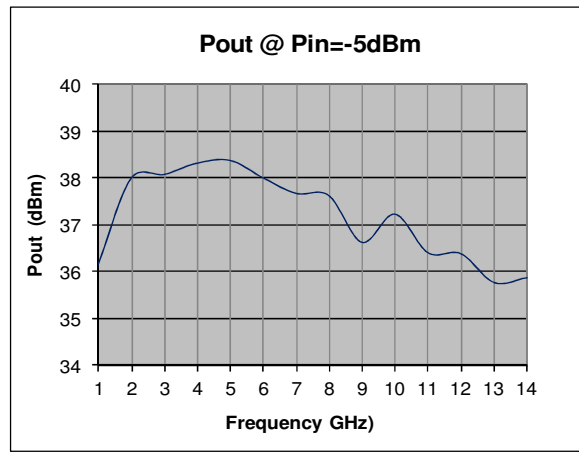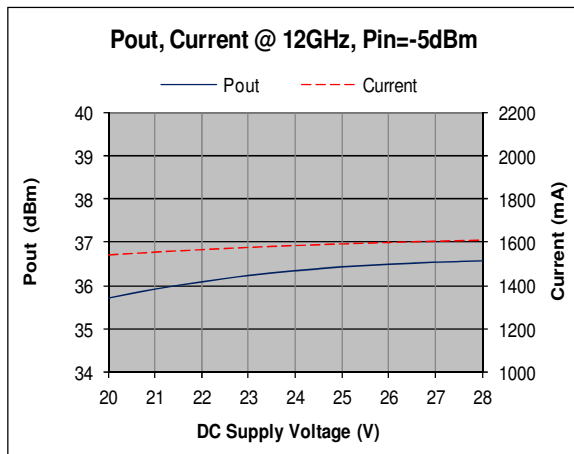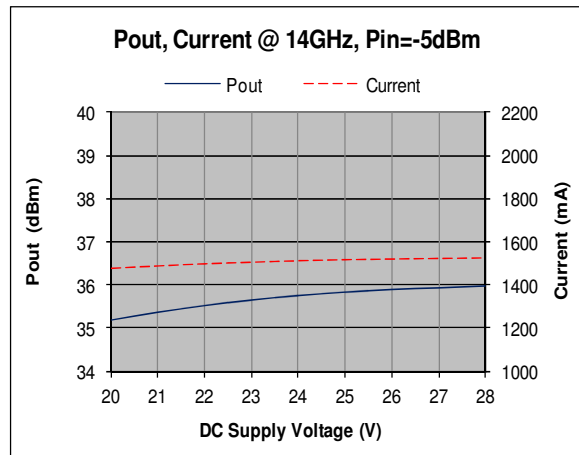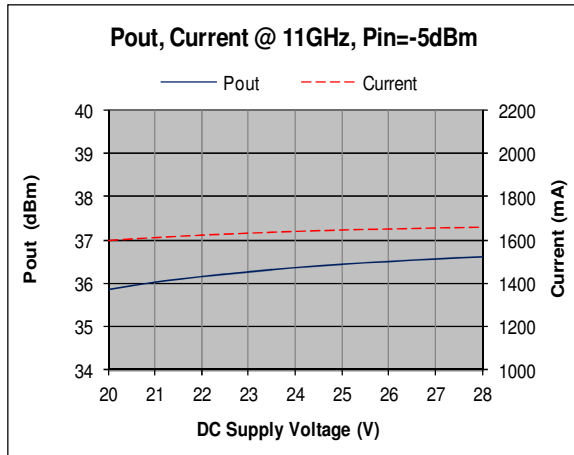

JPA Series

1-14GHz 4W RF Power Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage (Survival)	+29V
RF Input Power	+10dBm
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-55 °C to +125 °C

ESD Sensitive Material




Warning and Caution:

- 1) Adequate heatsink must be used. Cooling Fan highly recommended. Amplifier operational baseplate temperature must be within datasheet operating temperature range.**
- 2) Load must be connected to amplifier output at all time if DC power is ON.**
- 3) If power amplifier connected to an antenna for signal transmission, it is strongly recommended to use a high power isolator or fixed attenuator between amplifier output and antenna input.**

JPA Series

1-14GHz 4W RF Power Amplifier

Outline

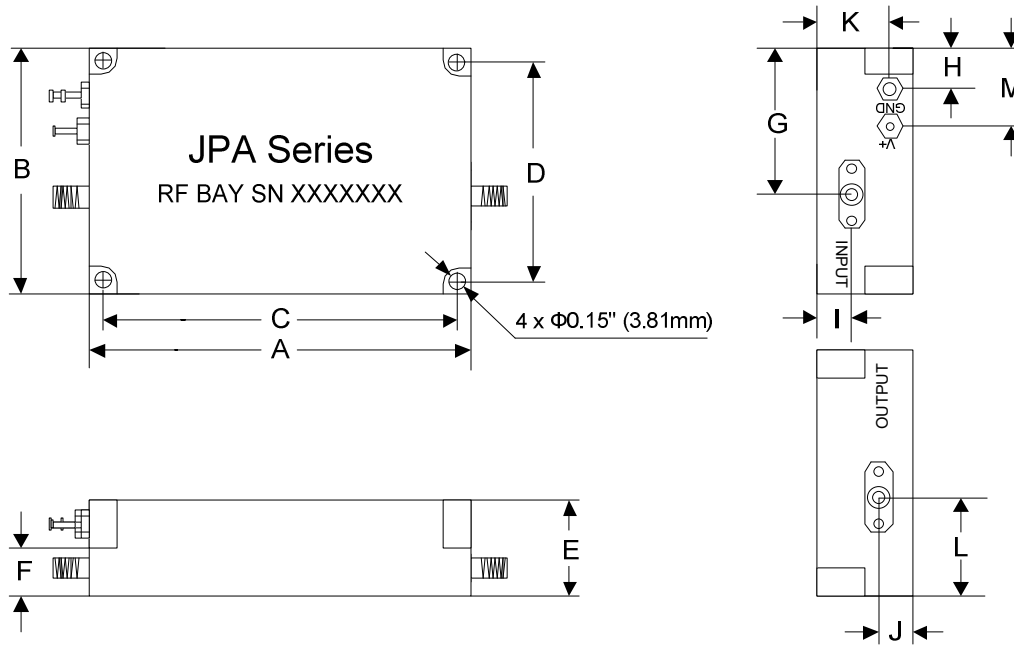

Mounting screws recommended to use hex socket head cap #6x3/4"

	A	B	C	D	E	F	G	H	I
Inch	4.00	2.50	3.70	2.20	1.05	0.54	1.40	0.30	0.30
mm	101.60	63.50	93.98	55.88	26.67	13.72	35.56	7.62	7.62
	J	K	L	M					
Inch	0.30	0.75	1.10	0.70					
mm	7.62	19.05	27.94	17.78					