

LNA Series

3.0 – 4.0GHz Low Noise Amplifier

Features

- Frequency Range: 3.0 – 4.0GHz
- Gain: 17.5dB
- P_{1dB}: +18.5dBm
- IP3: +33.7dBm
- Noise Figure: 1dB
- DC Power: 5V/65mA
- SMA Connector

Performance measured @ 3.5GHz

Description

LNA-3040 is a 1dB Noise Figure Low Noise Amplifier operates in wideband with frequency range from 3.0GHz to 4.0GHz.







Picture









Electrical Specifications @ +25 °C, Z_{in} = Z_{out} = 50 Ω, V_{cc} = 5V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	3.0		4.0
Gain	f = 3.0GHz		21.0	
	f = 3.5GHz		17.5	
	f = 4.0GHz		14.5	
P _{1dB}	f = 3.0GHz		+18.5	
	f = 3.5GHz		+19.0	
	f = 4.0GHz		+19.0	
IP3	f = 3.0GHz		+32.0	
	f = 3.5GHz		+33.7	
	f = 4.0GHz		+34.8	
Noise Figure	dB		1.0	
Reverse Isolation	dB		-30	
VSWR	Input VSWR		1.8:1	
	Output VSWR		1.4:1	
DC Power Supply	V	3	5	5.5
Supply Current	mA		65	

Typical Performance @ +25 °C

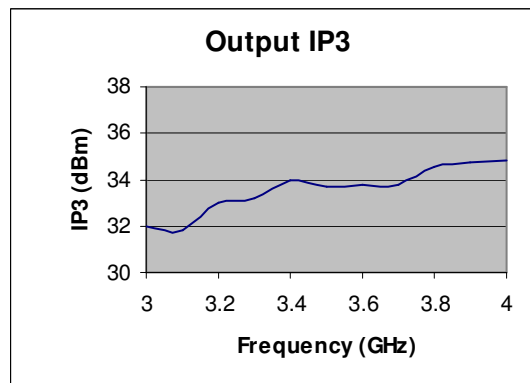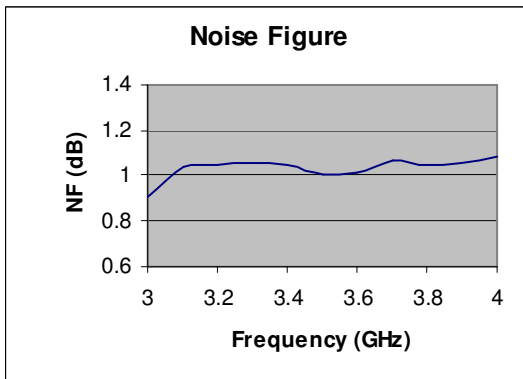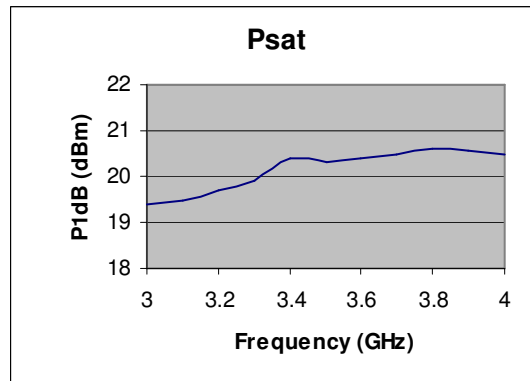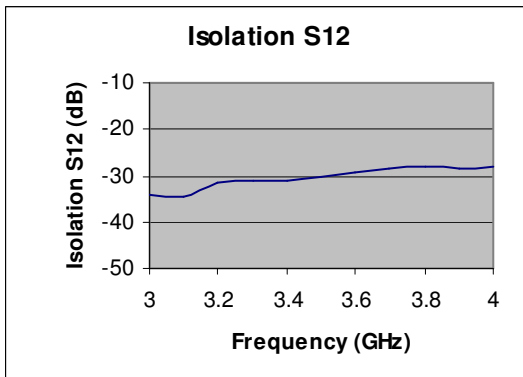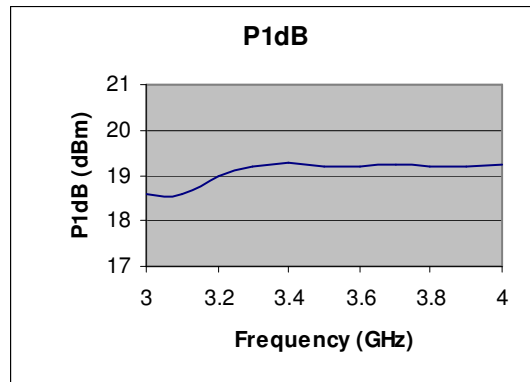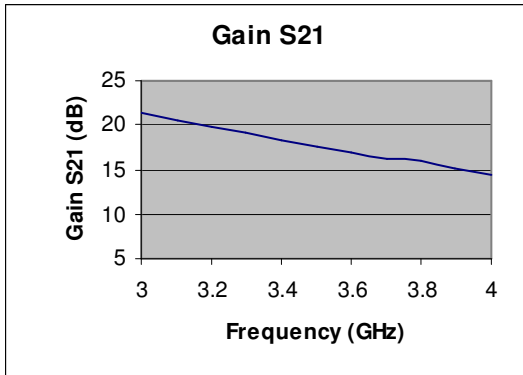


Typical Performance @ +25 °C

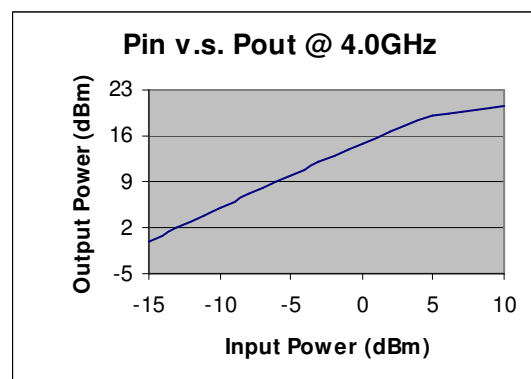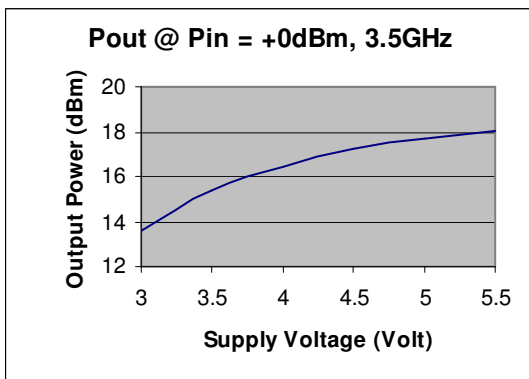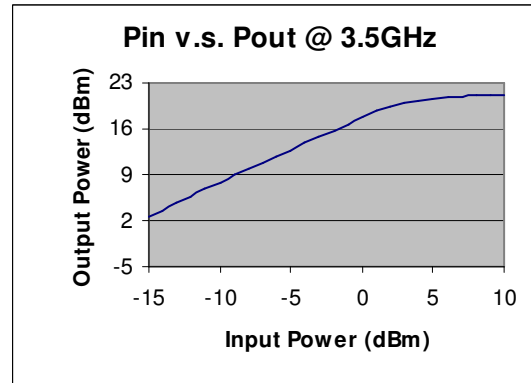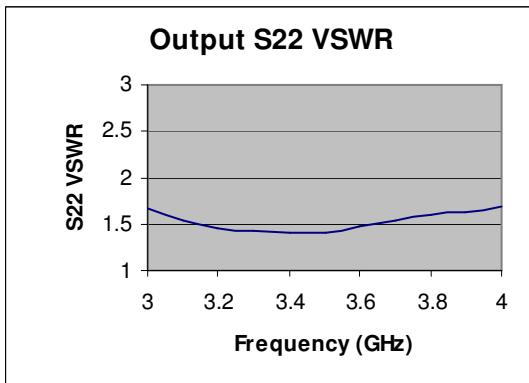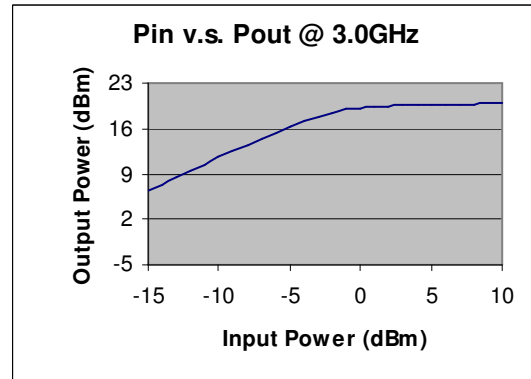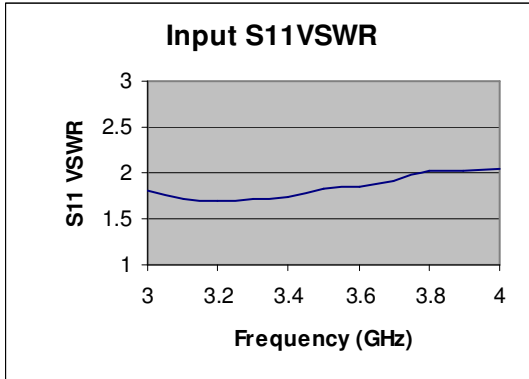

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

Outline

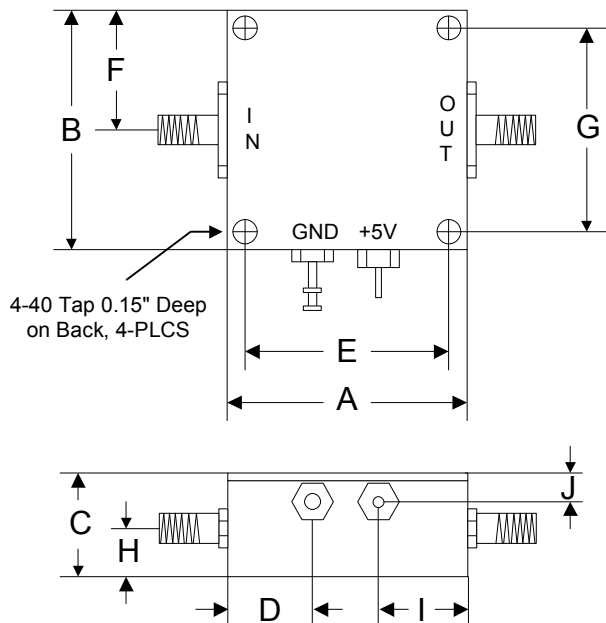

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76