

## LNA Series

## 5700 – 5900MHz Low Noise Amplifier

### Features

- Frequency Range: 5.7 – 5.9GHz
- Gain: 16dB
- P<sub>1dB</sub>: +12dBm
- IP3: +24dBm
- Noise Figure: 2.0dB
- DC Power: 12V
- SMA Connector

Performance measured @ 5.8GHz

### Description

LNA-5800 is a 16dB Gain Low Noise Amplifier operates with frequency range for 5.8GHz ISM Band.







### Picture



### Electrical Specifications @ +25 °C, Z<sub>in</sub> = Z<sub>out</sub> = 50 Ω

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	GHz	5.7		5.9
Gain				
f = 5.7 GHz	dB		16	
f = 5.8 GHz	dB		16	
f = 5.9 GHz	dB		16	
P <sub>1dB</sub>				
f = 5.7 GHz	dBm		+12	
f = 5.8 GHz	dBm		+12	
f = 5.9 GHz	dBm		+12	
IP3				
f = 5.8 GHz	dBm		+24	
Noise Figure	dB		2.0	
Reverse Isolation	dB		-35	
VSWR				
f = 5.7 – 5.9 GHz				
Input VSWR			1.7:1	
Output VSWR			1.4:1	
DC Power Supply	V	7	12	15
Supply Current	mA		55	


### Typical Performance @ +25 °C

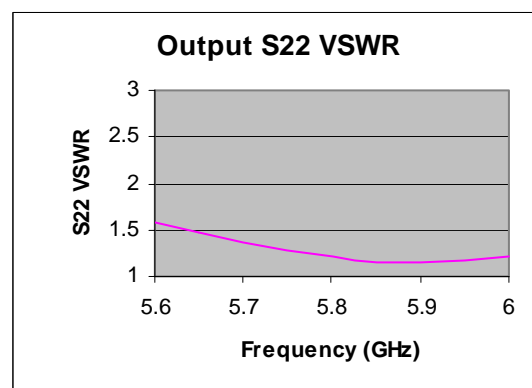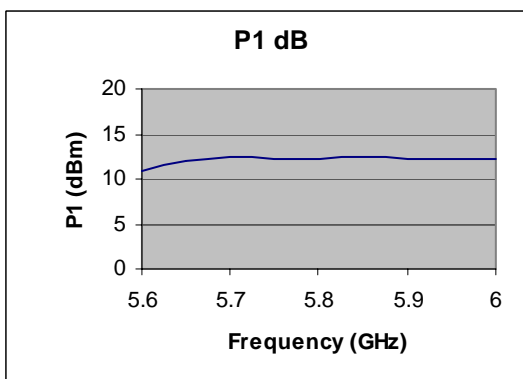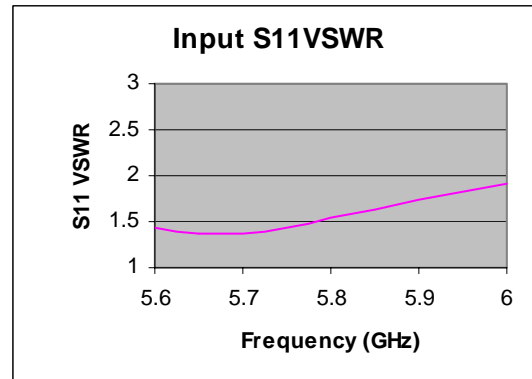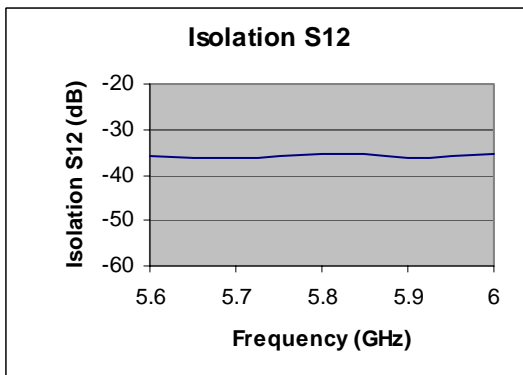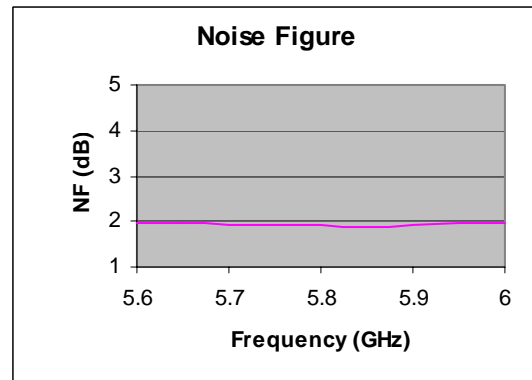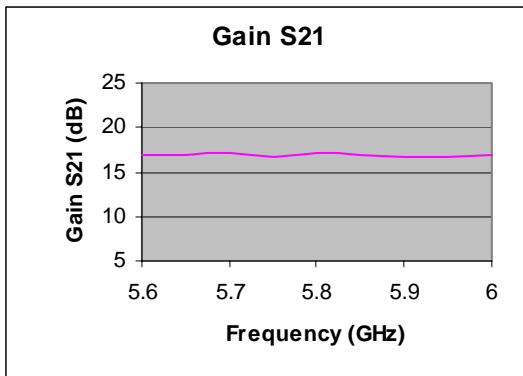

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### Outline

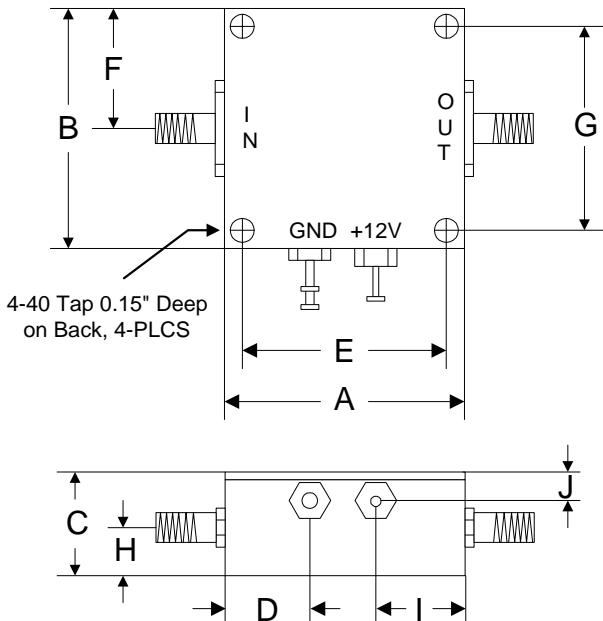

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76