

## LNA Series

## 300 – 1200MHz Low Noise Amplifier

### Features

- Frequency Range: 300 – 1200MHz
- Gain: 40dB
- P<sub>1dB</sub>: +19dBm
- IP3: +34dBm
- Noise Figure: 0.6dB (typ.)
- DC Power: 12V @ 125mA
- SMA-female

Performance measured @ 750MHz

### Description

LNA-750 is a 0.6dB Noise Figure Low Noise Amplifier operates with frequency range from 300 to 1200MHz.

### Photo




### Electrical Specifications @+25 °C, Z<sub>in</sub>=Z<sub>out</sub>= 50 Ohm, DC Voltage = +12V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	300		1200
Gain (S <sub>21</sub> ) f = 300MHz	dB	41	43	
f = 750MHz	dB	38	40	
f = 1200MHz	dB	33	35	
Gain Flatness	dB		± 4.0	± 5.0
Output Power P <sub>1dB</sub>	dBm	+17	+19	
Output Third Order Intercept IP3	dBm	+32	+34	
Noise Figure f = 750MHz	dB		0.6	0.8
Reverse Isolation (S <sub>12</sub> ) f = 750MHz	dB	-40	-47	
VSWR-Input (S <sub>11</sub> ) f = 750MHz			1.4:1	2.0:1
VSWR-Output (S <sub>22</sub> ) f = 750MHz			1.4:1	2.0:1
DC Power Supply - voltage	V	11	12	13
DC Power Supply - current	mA		125	140
Operating Temperature	°C	-40		+85
Size (RF/DC feedthru's excluded)	Inch	1.25 (L) x 1.25 (W) x 0.56 (H)		
Weight	Oz	1.6 (45 grams)		


**LNA Series**

**300 – 1200MHz Low Noise Amplifier**

**Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency**

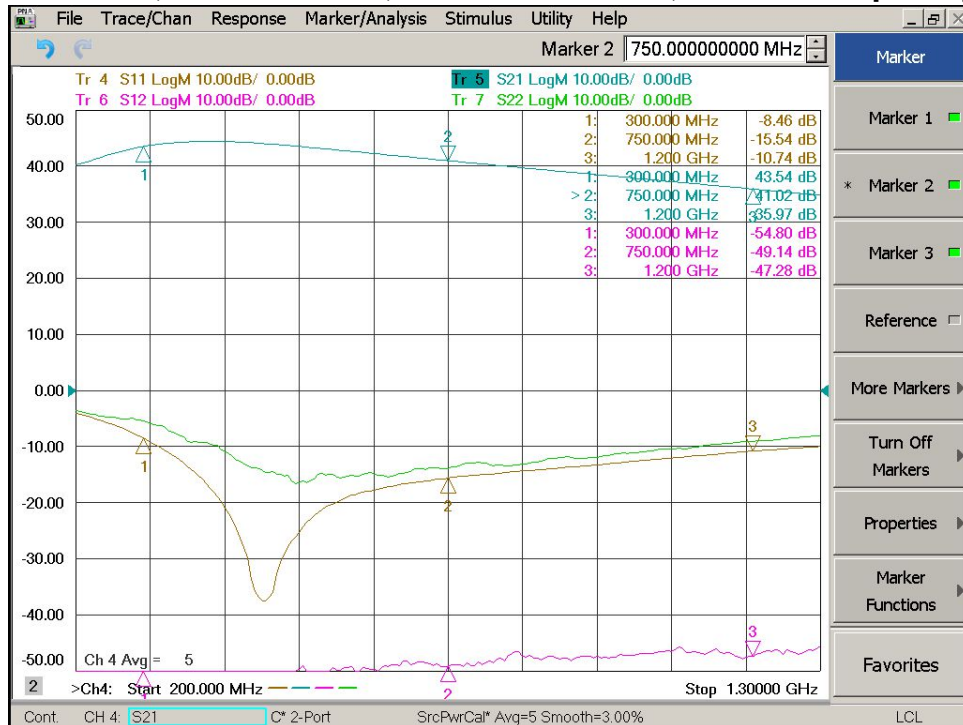


**Noise Figure vs Frequency**

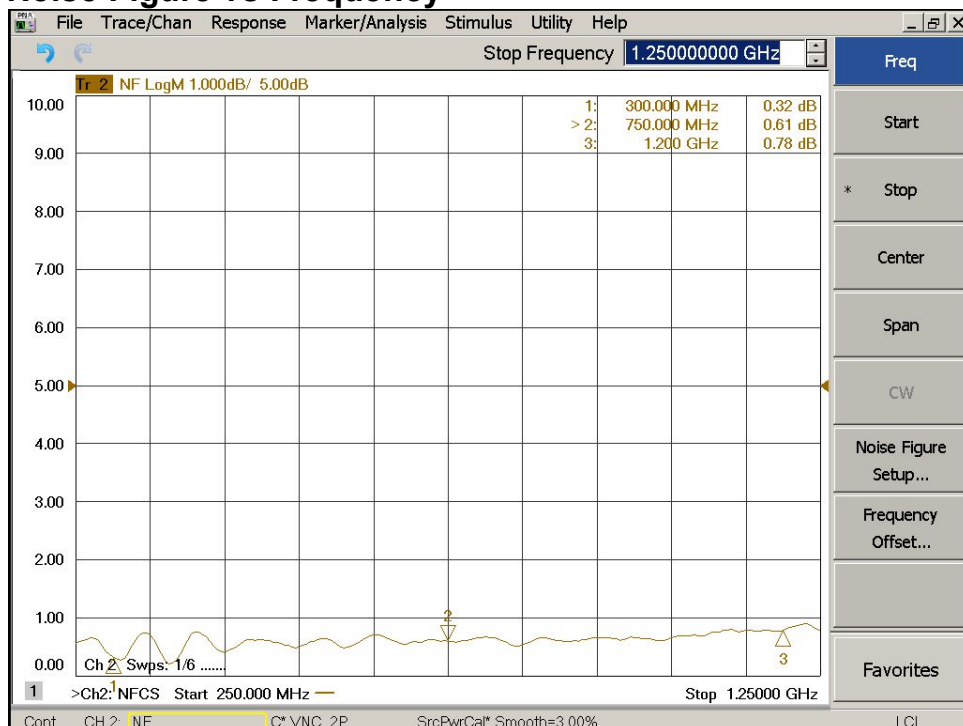


**LNA Series**

**300 – 1200MHz Low Noise Amplifier**

**Output P1dB vs Frequency**

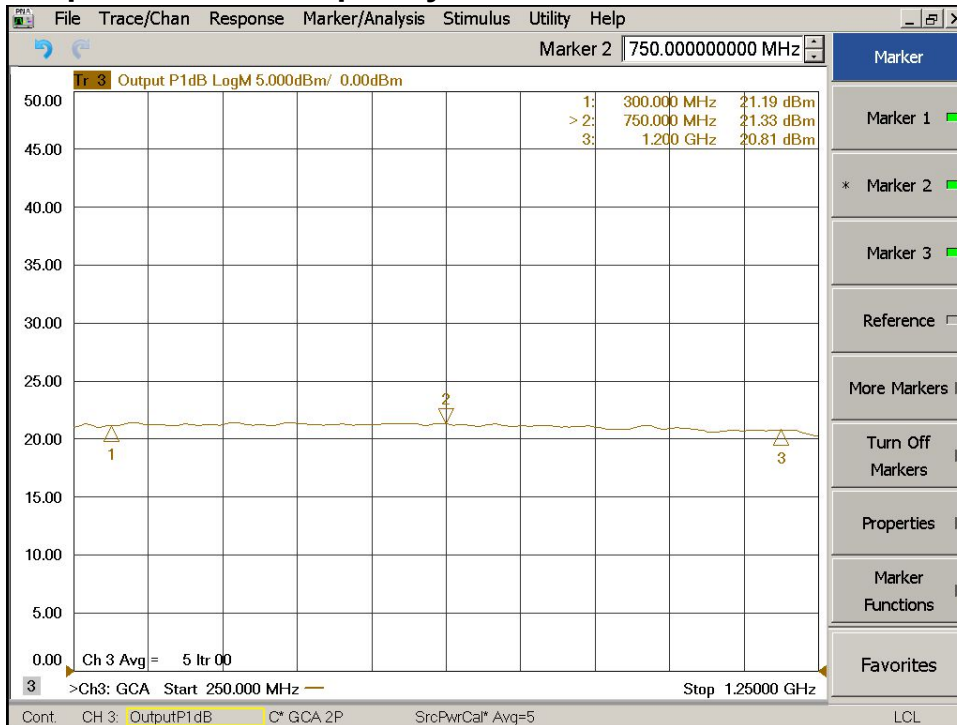

**Output IP3 vs Frequency**

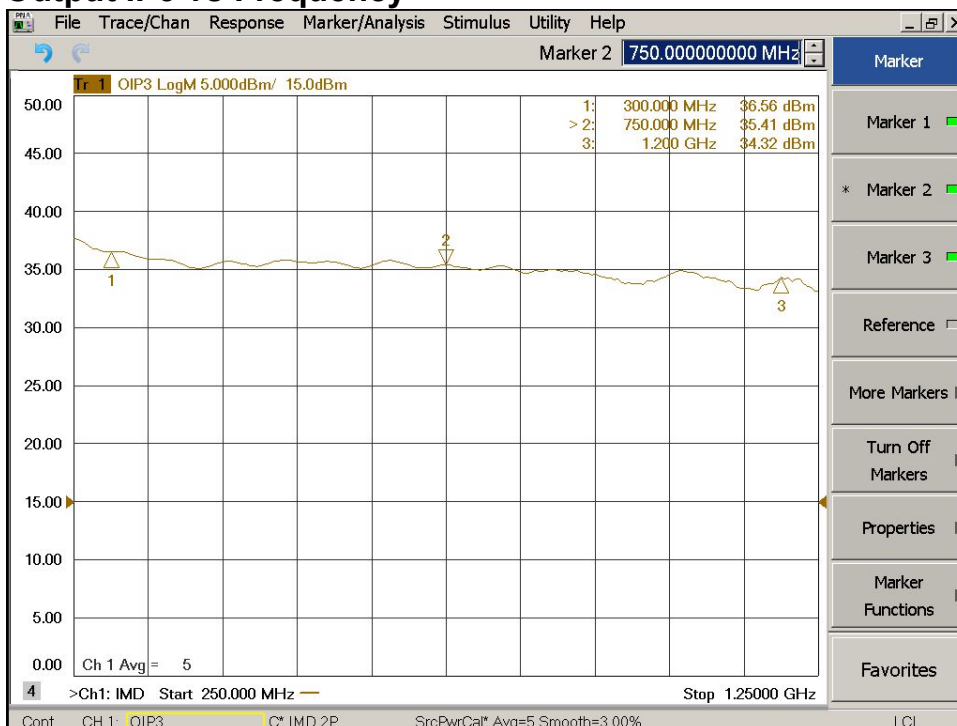

## LNA Series

## 300 – 1200MHz Low Noise Amplifier


### Absolute Maximum Ratings

Parameter	Absolute Maximum
Supply Voltage	+15V
RF Input Power	+13dBm
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### ESD Sensitive Material



### Outline

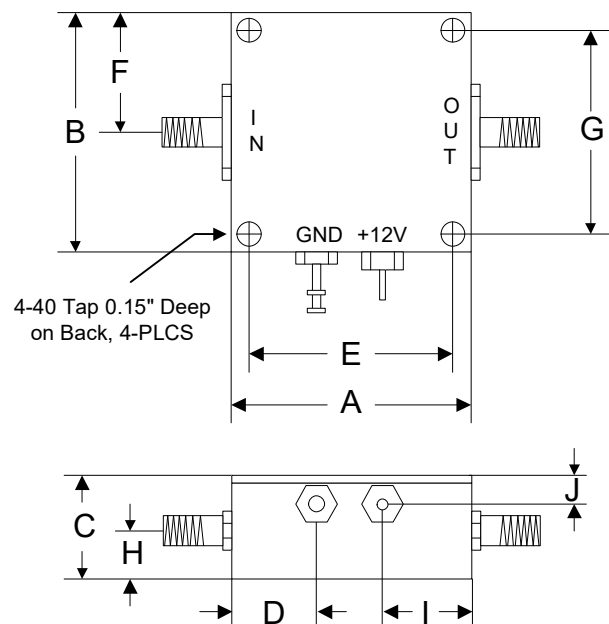

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76