

**2300-2450MHz VOLTAGE CONTROLLED  
OSCILLATOR****Features**

- Frequency: 2300-2450MHz
- Tuning Voltage: 0.5-4.5V
- Power Output: +3dBm
- Phase Noise: -101dBc/Hz @ 10KHz offset
- Power Supply: +7V to +15V
- Temperature: -40 °C to +85 °C
- SMA Connector

**Picture****Description**



VCO-2375 is a wide range voltage controlled oscillator with frequency range of 2300 to 2450MHz.

**Electrical Specifications @ +25 °C**

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	2300		2450
Tuning Voltage	Vdc	0.5		4.5
Phase Noise @ 10KHz offset (1 Hz BW, typ)	dBc/Hz		-101	
Tuning Sensitivity	MHz/V		50	
Power Output	dBm	+1	+3	+5
Harmonic Suppression (2 <sup>nd</sup> )	dBc		-15	
Load Impedance	$\Omega$		50	
Input Capacitance	pF		50	
Frequency Pulling	MHz		<2	
Supply Voltage	V	+7	+12	+15
Supply Current	mA		30	
Operating Temp Range	°C	-40		+85

**2300-2450MHz VOLTAGE CONTROLLED  
OSCILLATOR**

Typical Performance @ +25 °C

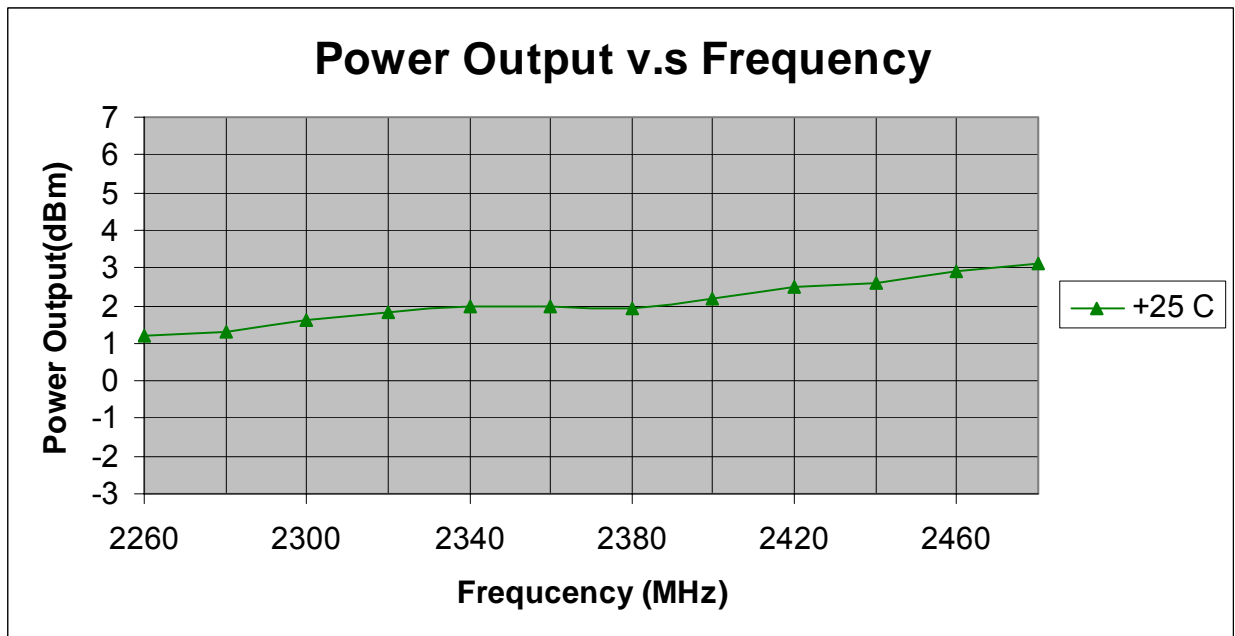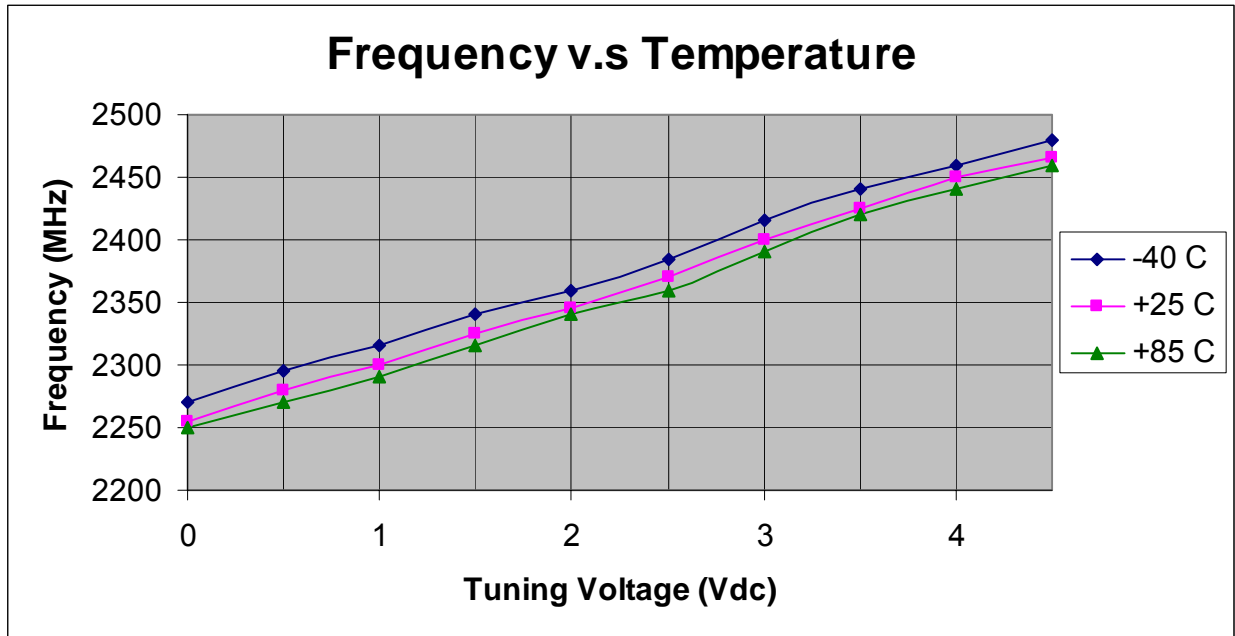


## 2300-2450MHz VOLTAGE CONTROLLED OSCILLATOR

### Absolute Maximum Ratings

Parameter	Absolute Maximum
Power Supply Voltage	+16V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

### Outline

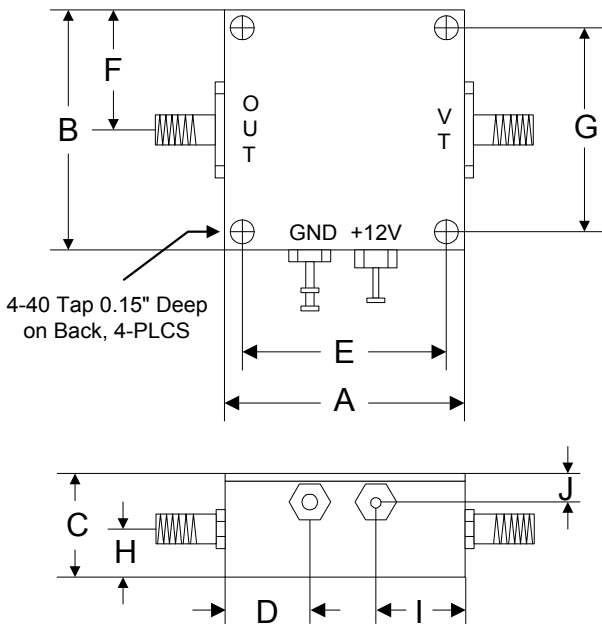

	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
<b>mm</b>	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76